


TUBIN 60 CONEX plug / socket

surface / suspended system
058-5024038C



| |
|----------------|
| Project / Type |
| Notes |
| Count / Date |

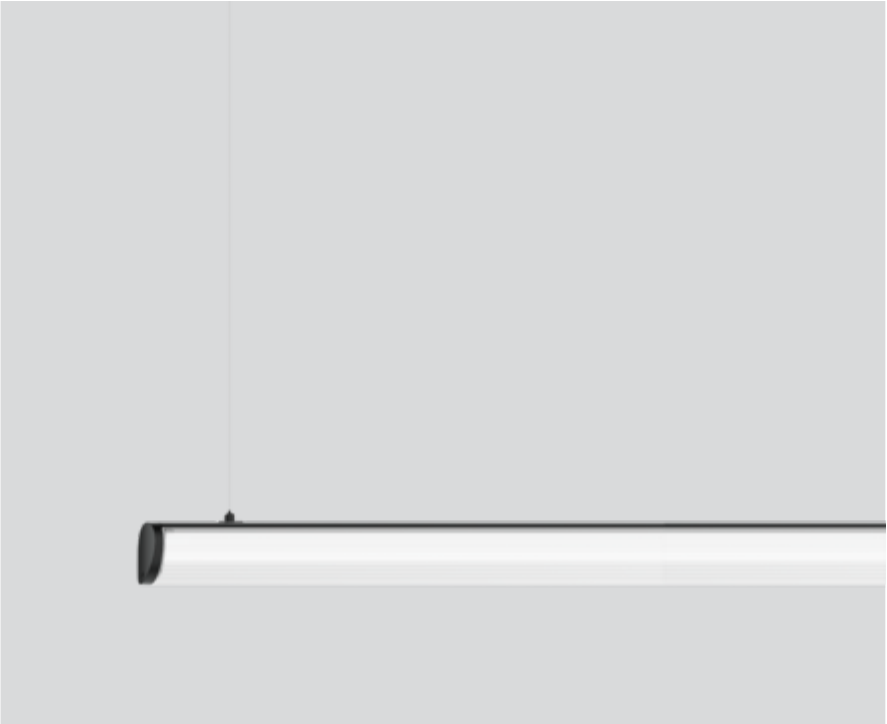

General

| |
|-------------------------------|
| Ceiling / Wall , Surface |
| black , RAL 9005 ¹ |
| IP20 |
| 2930 lm |
| 2490 lm/m |

LED

| |
|---|
| 3000 K |
| CRI ≥ 90 |
| L90 / 50000 h |
| initial MacAdam ≤ 3 SDCM |
| R _g : 99 , R _r : 91 , R _{t(1-15)} : 89 |
| MR 0.61 |
| MDER 0.55 |

Optical

| |
|--------------------------|
| Clear Cover |
| opal (lambertsch) |
| PstLM ≤ 1.0 ² |
| SVM ≤ 0.4 ² |


Electrical

| |
|------------------------------|
| DALI-2 |
| 220-240 V |
| system 27.9 W |
| system 105 lm/W ³ |
| PC1 |
| 24 W/m |

Physical

| |
|----------------|
| length 1181 mm |
| width 60 mm |
| height 60 mm |
| 1.05 kg |

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

