

SETA 60 CONEX

reflector direct plug / socket

surface / suspended system


058-4025138R



Project / Type

Notes

Count / Date

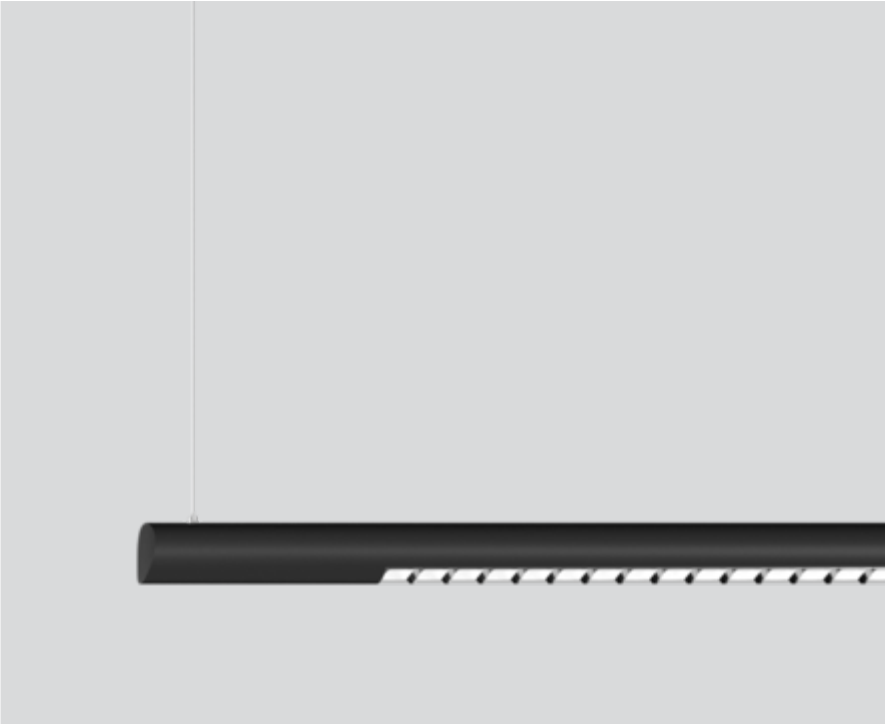

Luminaire housing made of extruded aluminium profile; extremely slim design (only Ø 60 mm) linear; converter integrated into luminaire housing; for lighting systems; surface black powder coated; for ceiling surface mounting or suspended mounting (1500 mm cable suspension - oblique or straight - as an accessory); easy installation using ceiling clips (available as an accessory) or with integrated toolless suspension height adjustment on the luminaire; canopy for through wiring (available as an accessory); electrical connection of the luminaires via plug/socket system; connectors (L-, T- or X-shape) available as an accessory; luminaire connection rotatable around its own axis, which means that any spatial angle can be realized; extruded profile for improved thermal management; high gloss reflector with faceted design; $UGR \leq 19$; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; light colour 4000 K; binning initial MacAdam $\leq 3 \text{ SDCM}$; $CRI \geq 90$; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General

Ceiling | Suspended

black | RAL 9005¹

chrome

IP20

3280 lm

LED

4000 K

$CRI \geq 90$

L90 / 50000 h

initial MacAdam $\leq 3 \text{ SDCM}$

$R_g: 99 | R_f: 92 | R_{f(1-15)}: 90$

MR 0.81 | MDER 0.74

Optical

Reflector | symmetric

$UGR \leq 19 | \geq 65^\circ < 1500 \text{ cd/m}^2$

$P_{stLM} \leq 1.0^2 | SVM \leq 0.4^2$

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 24.9 W

system 132 lm/W³


plug / socked

Physical

length 1474 mm | width 60 mm | height 60 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions



Lighting calculator



[‘058-4025138R’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com