MITA circle 450 reflector

trim

074-8126138B

Project / Type

Notes

Count / Date

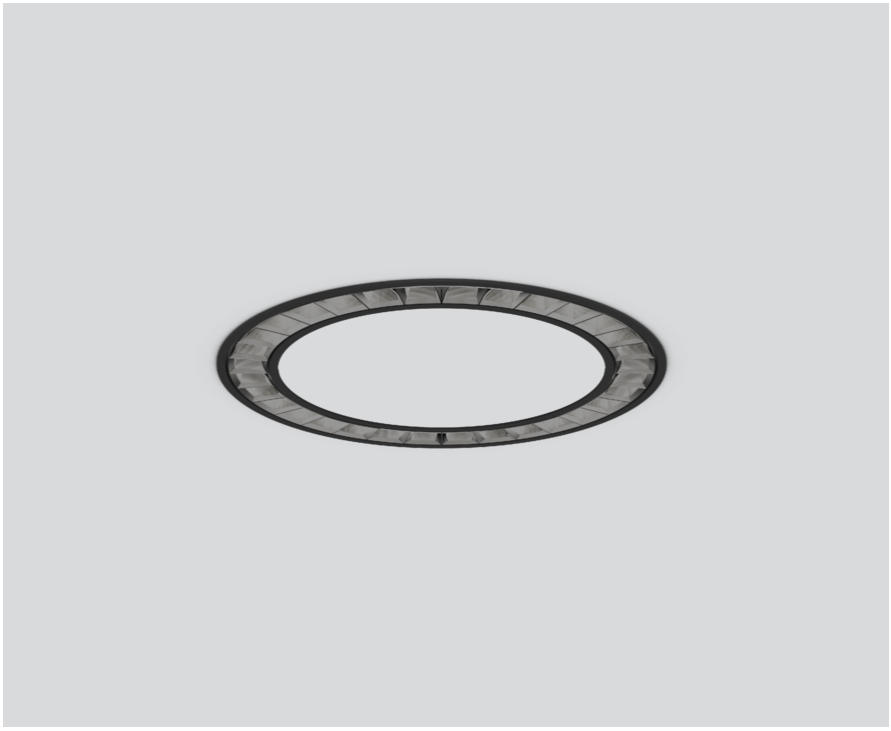

Ring-shaped light fitting in die-cast aluminium; extremely slim design; recessed light with wrap around edge; suitable for ceiling thickness of 2-25 mm; surface black powder coated; blind cover to cover the cut-out available as an accessory; accessories are listed separately; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector dark chrome; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection IP20; PC2; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; converter wired secondary side; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling , Recessed
black , RAL 9005 [1]
Reflector dark chrome
IP20
3650 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 , R_f: 92 , R_{f1-15}: 90
MR 0.81
MDER 0.74

Optical

Reflector
symmetric
UGR ≤ 19 , ≥65° <1500 cd/m²
PstLM ≤ 1.0 [2]
SVM ≤ 0.4 [2]

Electrical

DALI-2
220-240 V
system 40 W
system 91 lm/W[3]
PC2
1 DALI Addr.

Physical

trim
diameter 444 mm
height 47 mm

Cutout

diameter 432 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 60 mm

[1] RAL code [2] Value of containing product at full load (undimmed)
[3] incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

Lighting calculator

['074-8126138B'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com