


180-713073XF



Project / Type

Notes

Count / Date

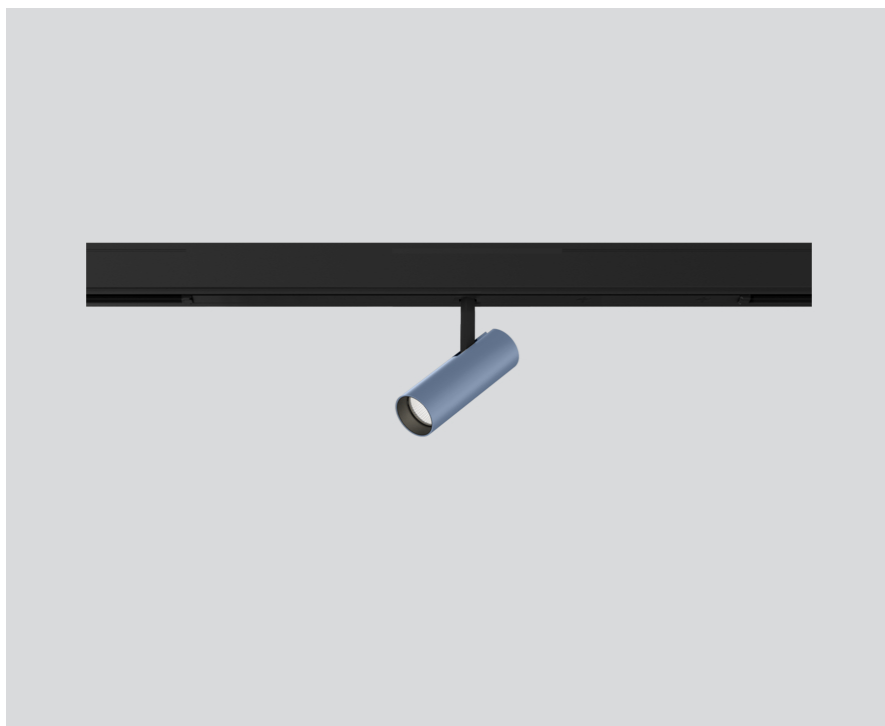

Ceiling | Track

tilt max 90°

rotation 360°

special colour

special colours

IP20

704 lm

3500 K

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_q: 97 | R_f: 90 | R_{1-15}: 89

MR 0.7 | MDER 0.63

flood | beam angle 37°

DALI-2 | 1 DALI Addr.

PC2 | 220-240 V

system 10.7 W

system 66 lm/W¹


diameter 32 mm | height 100 mm

[†] incl. consideration of optical losses, internal control unit losses & operating device efficiency

flood 37°

h (m)	E0° (lx)	ø (m)
1	1950	0.67
2	490	1.34
3	220	2.01
4	120	2.68
5	80	3.35

Product drawing



Installation instructions



Lighting calculator

