

BO 32 intrack 1 lamp


180-713053XF




Project / Type

Notes

Count / Date

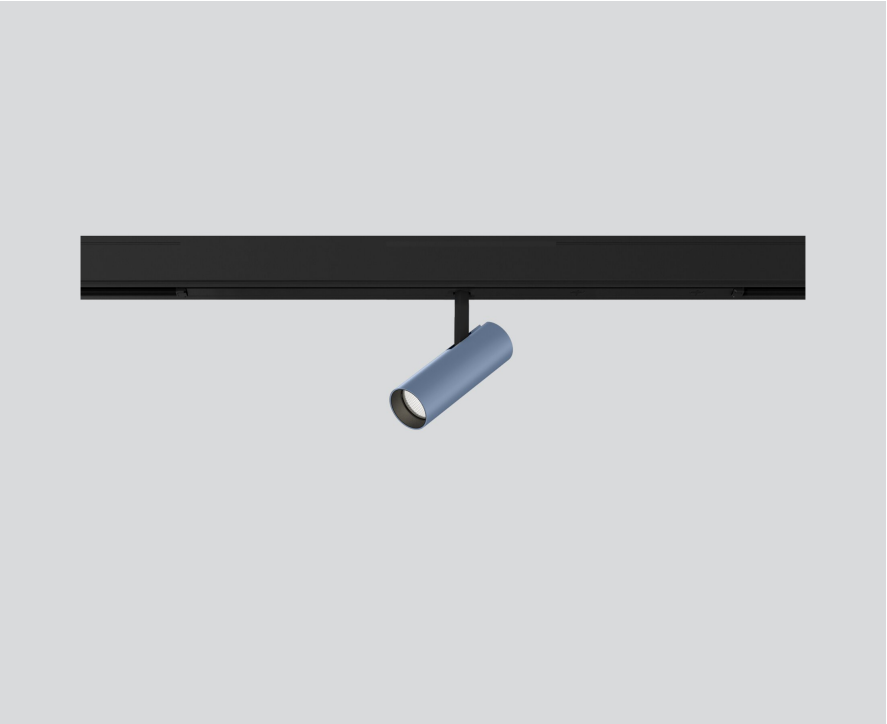

Tracked spotlight in die-cast aluminium with 3-phase adapter; classic style in elegant design for discerning requirements; 1 lamp; cylindrical spotlight head; surface special colours powder coated; spotlight head 360° rotatable and 90° tiltable; converter integrated in the power track adapter; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 37° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter flush with the power track; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General

Ceiling | Track

tilt max 90°

rotation 360°

special colours

IP20

775 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 | R_f: 90 | R_{t(1-15)}: 87

MR 0.6 | MDER 0.54

Optical

flood | beam angle 37°

Electrical

DALI-2 | 1 DALI Addr.

PC2 | 220-240 V

system 10.6 W

system 73 lm/W ¹


Physical

diameter 32 mm | height 100 mm

0.3 kg

¹ incl. consideration of optical losses, internal control unit losses & operating device efficiency


Light distribution



flood 37°

h (m)	EO ⁹ (lx)	ø (m)
1	2140	0.67
2	540	1.34
3	240	2.01
4	130	2.68
5	90	3.35

Product drawing



Installation instructions



Lighting calculator

