

# MOVE IT 45 set track x-large


indirect suspended  
091-2124138



Project / Type

Notes

Count / Date

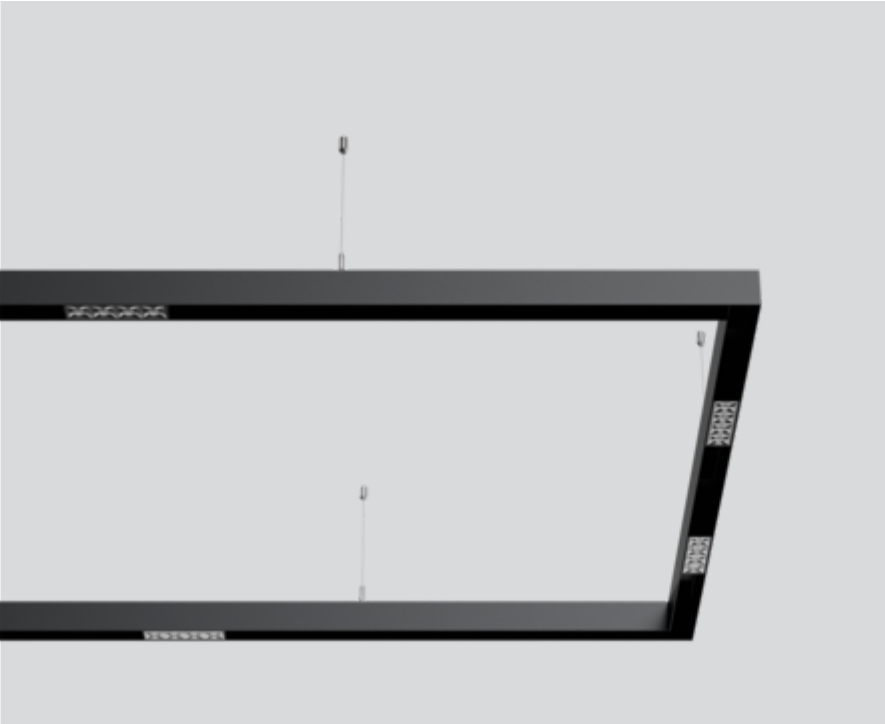

General
Ceiling   Track Suspended
X-LARGE
jet black   RAL 9005 <sup>1</sup>
IP20
indirect 11100 lm
total 11100 lm
optical inset 135 lm/W <sup>2</sup>

LED
3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 99   R <sub>r</sub> : 91   R <sub>t(1-15)</sub> : 89
MR 0.61   MDER 0.55


Electrical
DALI-2
PC3   48 V
fixture 92 W
optical inset 82 W

Physical
length 3102 mm   width 1262 mm   height 56 mm
16 kg
cable length 1500 mm


<sup>1</sup> RAL code <sup>2</sup> incl. consideration of optical losses

All-round extruded aluminium profile with 45 mm width groove; rectangular design; for suspended mounting (incl. 1500 mm cable suspension); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised jet black; light insets can be installed and moved without tools by means of magnetic holders+locking (for the illumination of office workstations); degree of protection IP20; PC3; 48 V; incl. DALI-2 converter (PC1 220-240V); acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties can be installed; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator

