

MOVE IT 45 set track x-large


indirect suspended
091-2124138



Project / Type

Notes

Count / Date

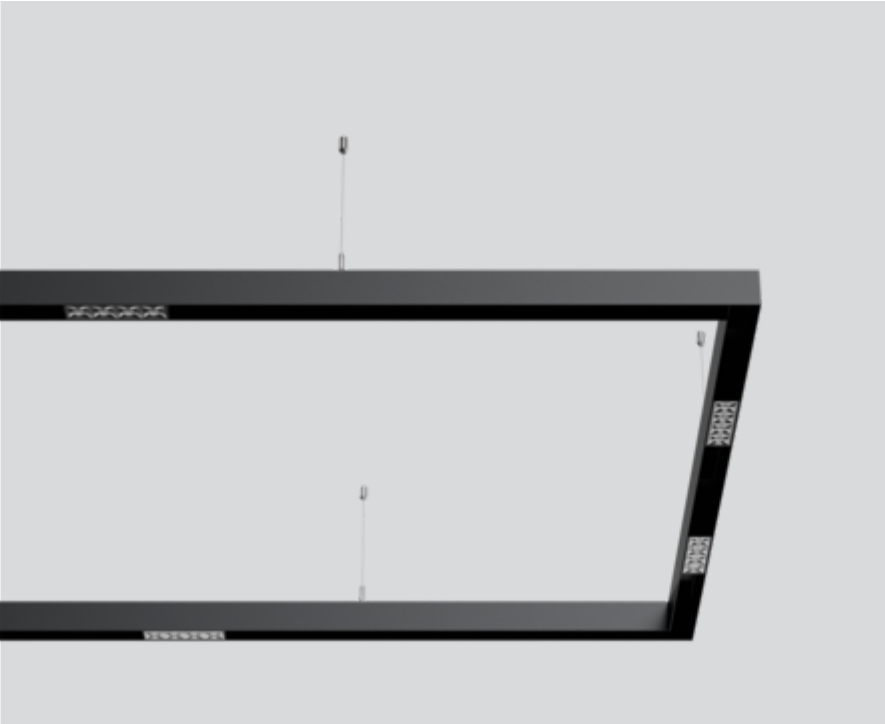

General

Ceiling | Track Suspended

X-LARGE

jet black | RAL 9005 ¹

IP20

indirect 11100 lm

total 11100 lm

optical inset 135 lm/W ²

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 | R_r: 91 | R_{t(1-15)}: 89

MR 0.61 | MDER 0.55

Electrical

DALI-2

PC3 | 48 V

fixture 92 W

optical inset 82 W

Physical

length 3102 mm | width 1262 mm | height 56 mm


16 kg

cable length 1500 mm


¹ RAL code ² incl. consideration of optical losses

All-round extruded aluminium profile with 45 mm width groove; rectangular design; for suspended mounting (incl. 1500 mm cable suspension); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised jet black; light insets can be installed and moved without tools by means of magnetic holders+locking (for the illumination of office workstations); degree of protection IP20; PC3; 48 V; incl. DALI-2 converter (PC1 220-240V); acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties can be installed; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator



MOVE IT 45 set track x-large

indirect suspended

091-2124138



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a Room Surface Maintenance Factor		
MF	Maintenance Factor		LLMF Lamp Lumens Maintenance Factor		
LMF ^a	Luminaire Maintenance Factor		LSF Lamp Survival Factor		

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	3
B13	4
B16	6
B20	7
C10	4
C13	6
C16	8
C20	9

Acoustic accessories

MOVE IT 45 set acoustic inlay small

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1140-1140-25	091-219111D
black	1140-1140-25	091-219111L
limestone	1140-1140-25	091-219111S
white	1140-1140-25	091-219111W



MOVE IT 45 set acoustic inlay medium

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1760-1140-25	091-219211D
black	1760-1140-25	091-219211L
limestone	1760-1140-25	091-219211S
white	1760-1140-25	091-219211W



MOVE IT 45 set acoustic inlay large

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	2360-1140-25	091-219311D
black	2360-1140-25	091-219311L
limestone	2360-1140-25	091-219311S
white	2360-1140-25	091-219311W



MOVE IT 45 set acoustic inlay x-large

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	2980-1140-25	091-219411D
black	2980-1140-25	091-219411L
limestone	2980-1140-25	091-219411S
white	2980-1140-25	091-219411W



[*091-2124138*] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.07.2025