

MOVE IT 45 set track

small indirect suspended


091-2121138



Project / Type

Notes

Count / Date

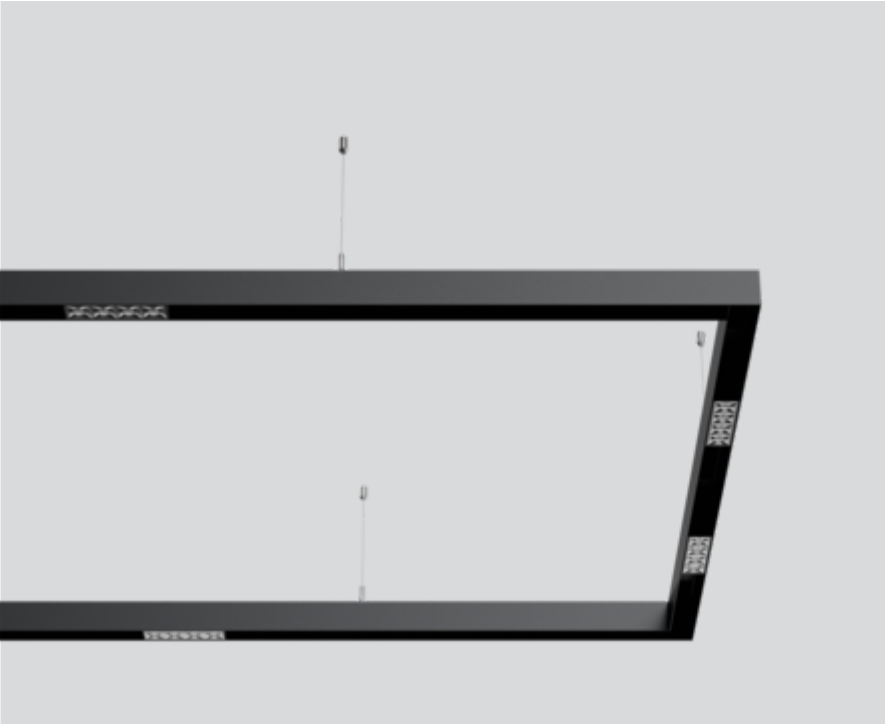

General

Ceiling | Track Suspended

SMALL

jet black | RAL 9005 ¹

IP20

indirect 6220 lm

total 6220 lm

optical inset 135 lm/W ²

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 | R_r: 91 | R_{t(1-15)}: 89

MR 0.61 | MDER 0.55

Electrical

DALI-2

PC3 | 48 V

fixture 52 W

optical inset 46 W

Physical

length 1262 mm | width 1262 mm | height 56 mm


9.1 kg

cable length 1500 mm


¹ RAL code ² incl. consideration of optical losses

All-round extruded aluminium profile with 45 mm width groove; square design; for suspended mounting (incl. 1500 mm cable suspension); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised jet black; light insets can be installed and moved without tools by means of magnetic holders+locking (for the illumination of office workstations); degree of protection IP20; PC3; 48 V; incl. DALI-2 converter (PC1 220-240V); acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties can be installed; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator

