

MINO CIRCLE ACOUSTIC 1000


ceiling
034-271111S



Project / Type


Notes

Count / Date

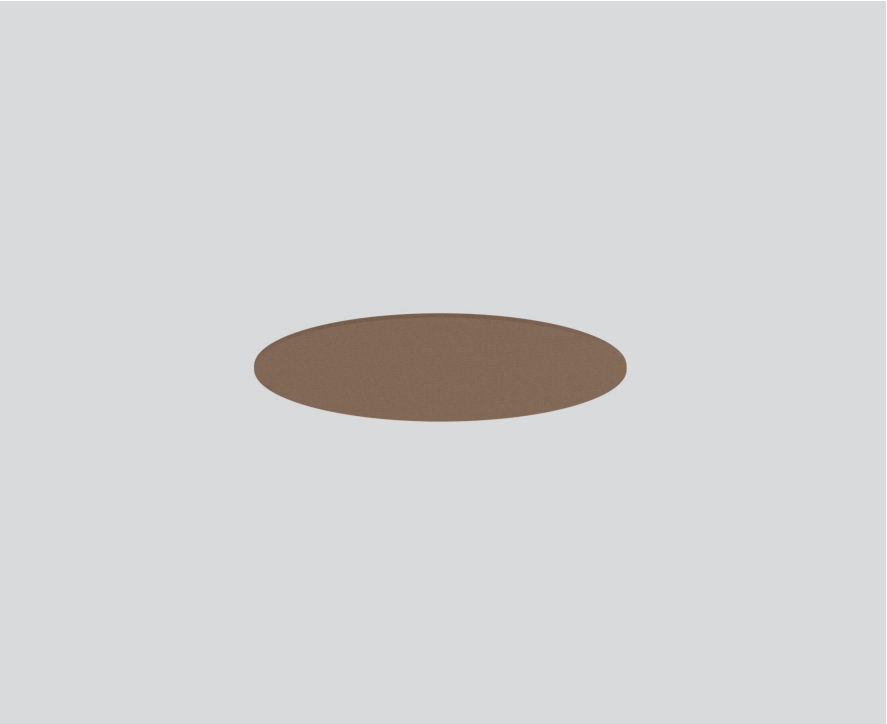

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, limestone; colour may deviate; absorption of direct sound; this creates high acoustic performance; for ceiling surface mounting;

Product drawing



General

Ceiling | Surface

limestone

fire resistance class: B-s1, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

diameter 937 mm | height 24 mm

4.5 kg

ceiling

Acoustics

Alpha w (α_w) up to 0.7 ¹

SAC (sound absorption class) up to C ¹

NRC up to 1.15 ¹

SAA up to 1.16 ¹

¹ Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 3cm

Installation instructions



MINO CIRCLE ACOUSTIC 1000

ceiling
034-271111S



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.1	0.27	0.7	1.17	1.07	1

Sound absorption coefficient (α_p)

