

MINO CIRCLE ACOUSTIC 1000


inlay
034-270111S



Project / Type

Notes

Count / Date

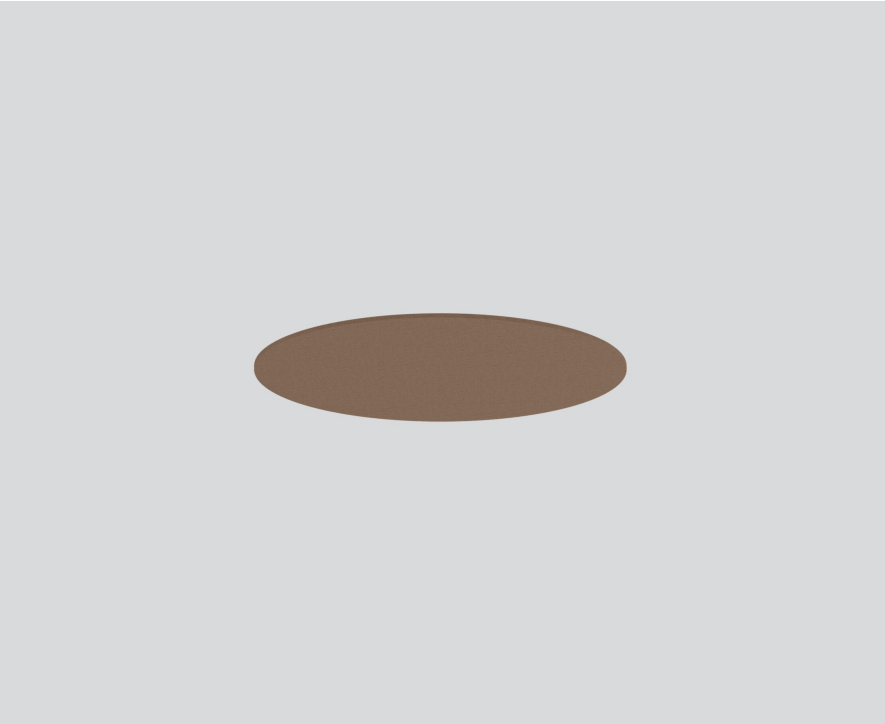

General

Luminaire / Track | Mounted

limestone

fire resistance class: B-s1, d0

Physical

diameter 937 mm | height 24 mm

4.3 kg

Acoustics

Alpha w (α_w) up to 0.65 ¹

SAC (sound absorption class) up to C ¹

NRC up to 0.7 ¹

SAA up to 0.74 ¹


¹ Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 100cm

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, limestone; colour may deviate; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for insertion into the MINO 60 CIRCLE 1000 ceiling or MINO 60 CIRCLE 1000 suspended;

Product drawing



MINO CIRCLE ACOUSTIC 1000

inlay
034-270111S



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.5	0.5	0.87	1.3	1.43	1.57

Sound absorption coefficient (α_p)

