

# MINO CIRCLE ACOUSTIC 1000


inlay  
034-270111S



Project / Type


Notes

Count / Date

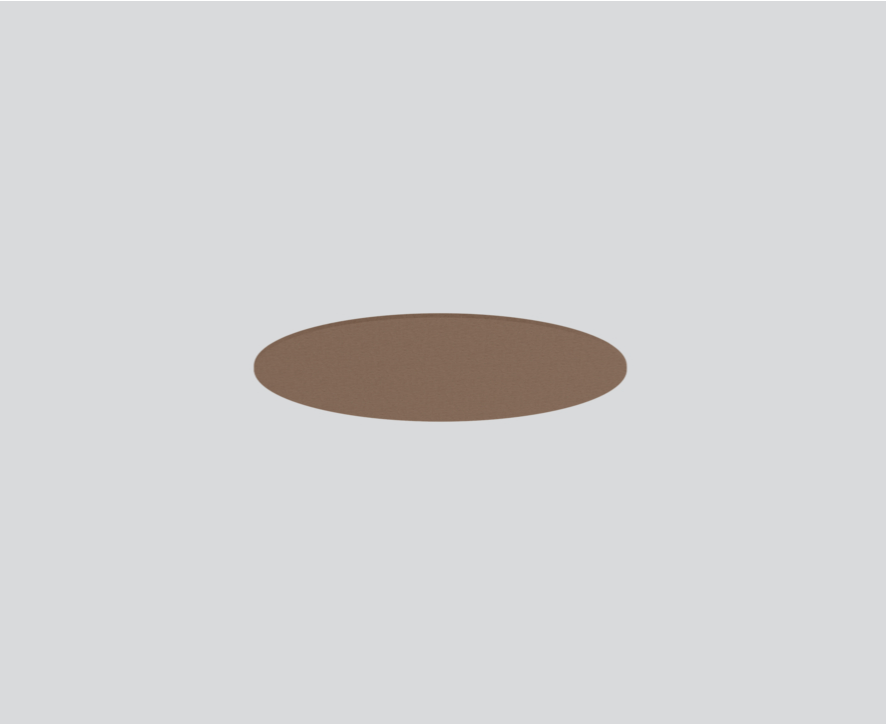

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, limestone; colour may deviate; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for insertion into the MINO 60 CIRCLE 1000 ceiling or MINO 60 CIRCLE 1000 suspended;

## Product drawing



**General**  
Luminaire / Track , Mounted  
limestone

**Physical**  
diameter 937 mm  
height 24 mm  
4.3 kg

**Acoustics**  
Alpha w ( $\alpha_w$ ) up to 0.65 <sup>1</sup>  
SAC (sound absorption class) up to C <sup>1</sup>  
NRC up to 0.7 <sup>1</sup>  
SAA up to 0.74 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 100cm

## Installation instructions



# MINO CIRCLE ACOUSTIC 1000

inlay  
034-270111S



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.5	0.5	0.87	1.3	1.43	1.57

## Sound absorption coefficient ( $\alpha_p$ )

