

# MINO 40 reflector

ceiling / suspended system


042-0116037R 042-1006017



Project / Type

Notes

Count / Date

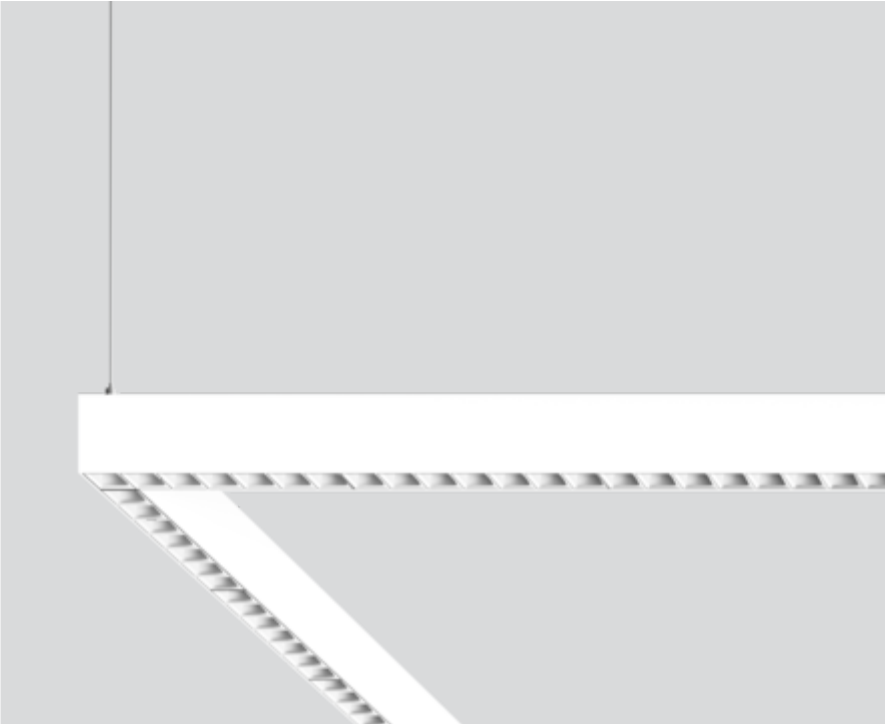

### General

Ceiling , Suspended

RAL Pure white , RAL 9010 <sup>1</sup>

Reflector chrome

IP20

8810 lm

2940 lm/m

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.61

MDER 0.55

### Optical

Reflector

Symmetric

UGR ≤ 19 , ≥65° <1500 cd/m<sup>2</sup>

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

220-240 V

system 67 W

system 131 lm/W<sup>3</sup>

PC1

1 DALI Addr.

22 W/m

### Physical

length 3000 mm

width 40 mm


height 65 mm

5.3 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Light distribution



### Product drawing



### Installation instructions

