

LED CONVERSION MODULE VELA / MENO 260

007-INRD0260163 006-CORD02601P



Project / Type

Notes

Count / Date



LED conversion module; suitable for VELA round / MENO round; highly reflective coating for improved efficiency; attached in the luminaire housing by means of magnets; microprismatic PMMA cover; completely homogeneous illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General

Luminaire / Track | Mounted

white

IP20

829¹-1020² lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72 | MDER 0.65

Optical

Microprismatic

$\geq 65^\circ$ <3000 cd/m²

PstLM ≤ 1.0 ^{1 2 3} | SVM ≤ 0.4 ^{1 2 3}

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 11.2 W


system 74¹-91² lm/W⁴

Physical


diameter 236 mm | height 88 mm

0.75 kg

Light distribution

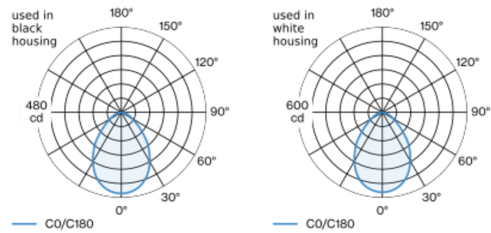

Product drawing



¹ used in black housing ² used in white housing
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

