

LED CONVERSION MODULE VELA / MENO 260

007-INRD0260163 006-CORD02601P



Project / Type

Notes

Count / Date



LED conversion module; suitable for VELA round / MENO round; highly reflective coating for improved efficiency; attached in the luminaire housing by means of magnets; microprismatic PMMA cover; completely homogeneous illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General

Luminaire / Track | Mounted

white

IP20

829¹-1020² lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72 | MDER 0.65

Optical

Microprismatic

$\geq 65^\circ$ <3000 cd/m²

PstLM ≤ 1.0 ^{1 2 3} | SVM ≤ 0.4 ^{1 2 3}

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 11.2 W


system 74¹-91² lm/W⁴

Physical


diameter 236 mm | height 88 mm

0.75 kg

Light distribution

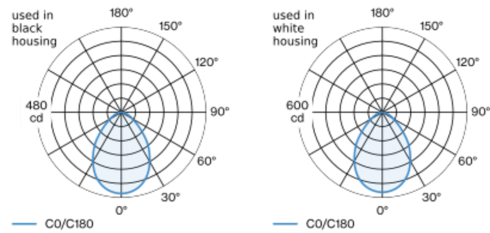

Product drawing



¹ used in black housing ² used in white housing
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LED CONVERSION MODULE VELA / MENO 260

007-INRD0260163 006-CORD02601P



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	31
B13	48
B16	60
B20	62
B25	78
C10	52
C13	81
C16	85
C20	104
C25	130

Components

MICROPRISMATIC COVER 260

ARTICLE NUMBER(S)
006-CORD02601P

