

# LED CONVERSION MODULE COMBO 260

007-INRD0260151 006-CORD026020



Project / Type

Notes

Count / Date



### General

Luminaire / Track | Mounted

white

IP20

823<sup>1</sup>-991<sup>2</sup> lm

### LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.56 | MDER 0.51

### Optical

Opal

PstLM ≤ 1.0<sup>2</sup> 1<sup>3</sup> | SVM ≤ 0.4<sup>2</sup> 1<sup>3</sup>

### Electrical

non DIM

PC1 | 220-240 V

system 11.1 W


system 74<sup>1</sup>-89<sup>2</sup> lm/W <sup>4</sup>

### Physical


diameter 236 mm | height 88 mm

LED conversion module; suitable for COMBO round; highly reflective coating for improved efficiency; attached in the luminaire housing by means of magnets; completely homogeneously illuminated, satinised PMMA cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution

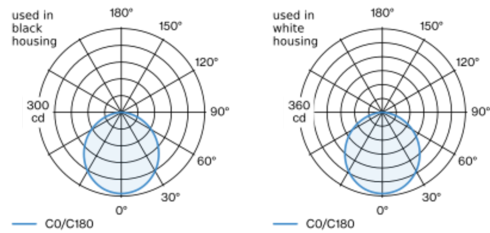

### Product drawing



<sup>1</sup> used in black housing <sup>2</sup> used in white housing  
<sup>3</sup> Value of containing product at full load (undimmed)  
<sup>4</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions

