

# LED CONVERSION MODULE VELA / MENO 260

007-INRD0260151 006-CORD02601P



Project / Type


Notes

Count / Date




LED conversion module; suitable for VELA round / MENO round; highly reflective coating for improved efficiency; attached in the luminaire housing by means of magnets; microprismatic PMMA cover; completely homogeneous illumination; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

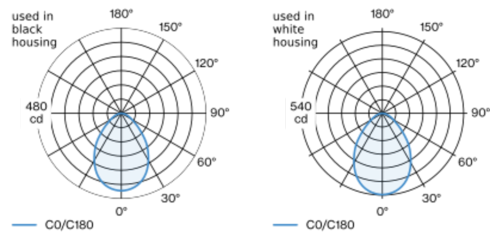

## Product drawing



## General

Luminaire / Track | Mounted

white

IP20

790<sup>1</sup>-975<sup>2</sup> lm

## LED

3000 K

CRI  $\geq 80$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

MR 0.56 | MDER 0.51

## Optical

Microprismatic

$\geq 65^\circ$  <3000 cd/m<sup>2</sup>

PstLM  $\leq 1.0$ <sup>1 2 3</sup> | SVM  $\leq 0.4$ <sup>1 2 3</sup>

## Electrical

non DIM

PC1 | 220-240 V

system 11.1 W

system 71<sup>1</sup>-88<sup>2</sup> lm/W<sup>4</sup>

## Physical

diameter 236 mm | height 88 mm

0.75 kg

<sup>1</sup> used in black housing <sup>2</sup> used in white housing  
<sup>3</sup> Value of containing product at full load (undimmed)  
<sup>4</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions

