

LED CONVERSION MODULE VELA / MENO / COMBO 1250


007-INRD1250153 006-CORD125010



Project / Type


Notes

Count / Date

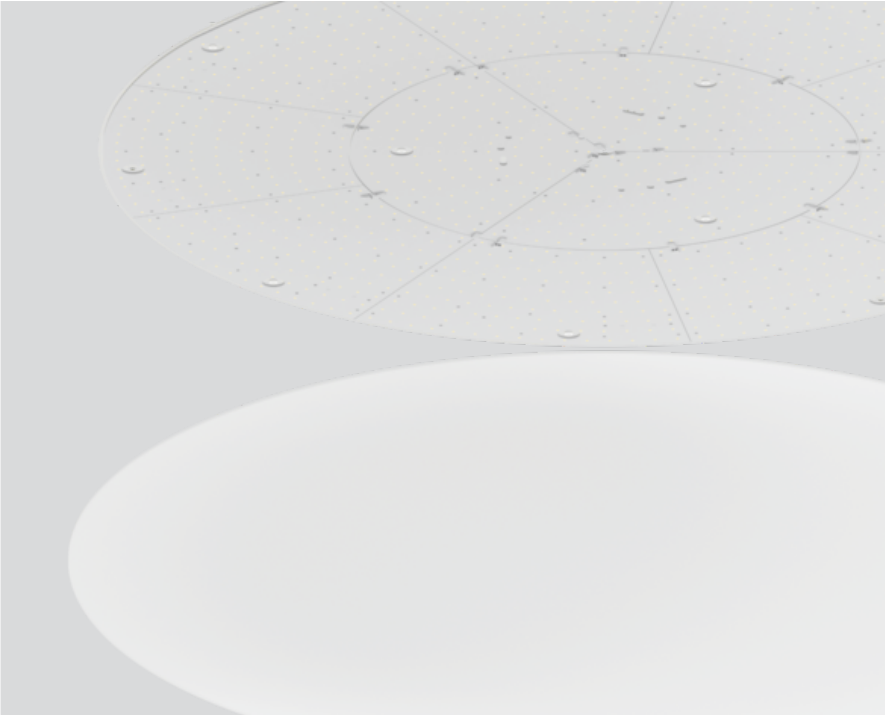


LED conversion module; suitable for VELA round / MENO round / COMBO round; highly reflective coating for improved efficiency; completely homogeneously illuminated, satinised PMMA cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

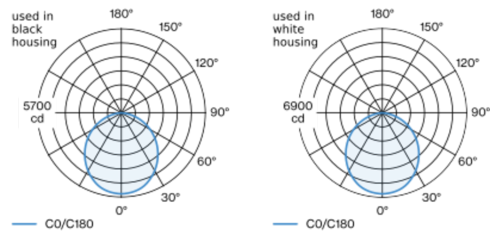

Product drawing



General

Luminaire / Track | Mounted

white

IP20

15100¹-18200² lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.56 | MDER 0.51

Optical

Opal

PstLM ≤ 1.0 ^{1 2 3} | SVM ≤ 0.4 ^{1 2 3}

Electrical

DALI-2 | 3 DALI Addr.

PC1 | 220-240 V

system 154 W

system 98¹-118² lm/W⁴

Physical

diameter 1180 mm | height 92 mm

11.9 kg

¹ used in black housing ² used in white housing
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

