

# LED CONVERSION MODULE VELA / MENO / COMBO 950

007-INRD0950153 006-CORD095010



Project / Type


Notes

Count / Date




LED conversion module; suitable for VELA round / MENO round / COMBO round; highly reflective coating for improved efficiency; completely homogeneously illuminated, satinised PMMA cover; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution

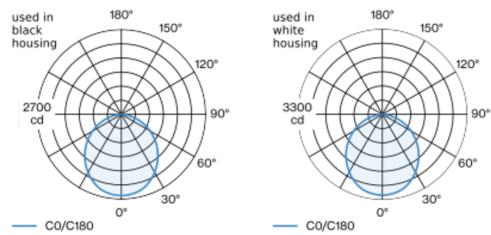

### Product drawing



### General

Luminaire / Track | Mounted

white

IP20

7130<sup>1</sup>·8600<sup>2</sup> lm

### LED

3000 K

CRI  $\geq 80$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

MR 0.56 | MDER 0.51

### Optical

Opal

PstLM  $\leq 1.0$ <sup>1</sup> <sup>2</sup> <sup>3</sup> | SVM  $\leq 0.4$ <sup>1</sup> <sup>2</sup> <sup>3</sup>

### Electrical

DALI-2 | 2 DALI Addr.

PC1 | 220-240 V

system 77 W

system 93<sup>1</sup>·112<sup>2</sup> lm/W<sup>4</sup>

### Physical

diameter 875 mm | height 92 mm

9.5 kg

<sup>1</sup> used in black housing <sup>2</sup> used in white housing  
<sup>3</sup> Value of containing product at full load (undimmed)  
<sup>4</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions

