

LED CONVERSION MODULE VELA / MENO / COMBO 950

007-INRD0950151 006-CORD09501P



Project / Type


Notes

Count / Date




LED conversion module; suitable for VELA round / MENO round / COMBO round; highly reflective coating for improved efficiency; microprismatic PMMA cover; completely homogeneous illumination; $UGR \leq 19$; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000 \text{ cd/m}^2$; light colour 3000 K; binning initial MacAdam $\leq 3 \text{ SDCM}$; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

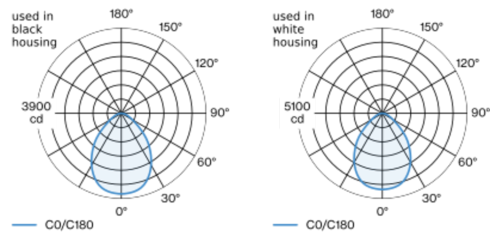

Product drawing



General

Luminaire / Track | Mounted

white

IP20

7010¹-8660² lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam $\leq 3 \text{ SDCM}$

MR 0.56 | MDER 0.51

Optical

Microprismatic

$UGR \leq 19$ | $\geq 65^\circ < 3000 \text{ cd/m}^2$

$P_{stLM} \leq 1.0$ ^{1 2 3} | $SVM \leq 0.4$ ^{1 2 3}

Electrical

non DIM

PC1 | 220-240 V

system 77 W

system 91¹-112² lm/W⁴

Physical

diameter 875 mm | height 92 mm

¹ used in black housing ² used in white housing
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

