

# LED CONVERSION MODULE VELA / MENO / COMBO 650

007-INRD0650161 006-CORD065010



Project / Type


Notes

Count / Date




LED conversion module; suitable for VELA round / MENO round / COMBO round; highly reflective coating for improved efficiency; attached in the luminaire housing by means of magnets; completely homogeneously illuminated, satinised PMMA cover; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution

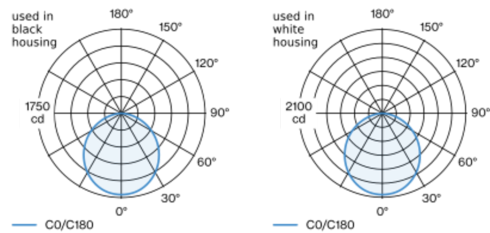

### Product drawing



### General

Luminaire / Track | Mounted

white

IP20

4800<sup>1</sup>-5780<sup>2</sup> lm

### LED

4000 K

CRI  $\geq 80$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

MR 0.72 | MDER 0.65

### Optical

Opal

PstLM  $\leq 1.0$ <sup>1 2 3</sup> | SVM  $\leq 0.4$ <sup>1 2 3</sup>

### Electrical

non DIM

PC1 | 220-240 V

system 50 W

system 96<sup>1</sup>-116<sup>2</sup> lm/W<sup>4</sup>

### Physical

diameter 572 mm | height 92 mm

2.82 kg

<sup>1</sup> used in black housing <sup>2</sup> used in white housing  
<sup>3</sup> Value of containing product at full load (undimmed)  
<sup>4</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



# LED CONVERSION MODULE VELA / MENO / COMBO 650

007-INRD0650161 006-CORD06501O



Project / Type

Notes

Count / Date

### Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

### Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	11
B13	14
B16	17
B20	21
C10	18
C13	23
C16	28
C20	35

### Components

#### OPAL COVER 650

ARTICLE NUMBER(S)  
006-CORD06501O

