

LED CONVERSION MODULE VELA / MENO / COMBO 350

007-INRD0350161 006-CORD035010



Project / Type

Notes

Count / Date



General

Luminaire / Track | Mounted

white

IP20

1470¹·1770² lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72 | MDER 0.65

Optical

Opal

PstLM ≤ 1.0¹ 2³ | SVM ≤ 0.4¹ 2³

Electrical

non DIM

PC1 | 220-240 V

system 16.6 W

system 89¹·107² lm/W⁴


Physical

diameter 322 mm | height 88 mm


1.13 kg

LED conversion module; suitable for VELA round / MENO round / COMBO round; highly reflective coating for improved efficiency; attached in the luminaire housing by means of magnets; completely homogeneously illuminated, satinised PMMA cover; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

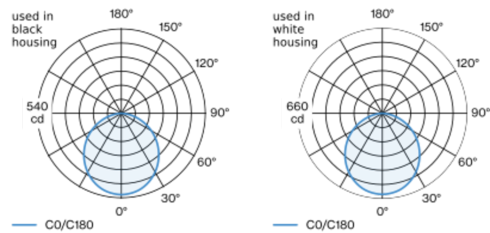

Product drawing



¹ used in black housing ² used in white housing
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

