

# SASSO 100 round wallwasher/floor

trim

048-2740219W 048-2796317 002-90780



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

rotation 360°

gold , RAL 260-M <sup>1</sup>

Mounting set traffic white

IP20

2720 lm

fixture 127 lm/W<sup>2</sup>

### LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.7

MDER 0.64

### Optical

wallwasher floor

### Electrical

non DIM

220-240 V

system 25.2 W

fixture 21.5 W

36 Vf

650 mA

PC2

### Physical

trim

diameter 118 mm

height 96 mm

0.61 kg

### Cutout


diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm

### Light distribution



### Product drawing

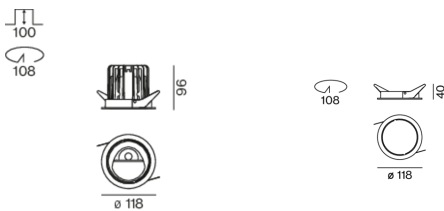

[‘048-2740219W 048-2796317 002-90780’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)