

# SASSO 100 round wallwasher/floor


trim 2 lamps

048-2740217W 048-279831G 002-90780




Round recessed spotlight in die-cast aluminium; 2 lamps; surface white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

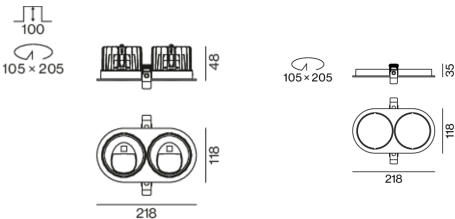

|                |  |
|----------------|--|
| Project / Type |  |
| Notes          |  |
| Count / Date   |  |



## General

|                               |
|-------------------------------|
| Ceiling , Recessed            |
| rotation 360°                 |
| white , RAL 9016 <sup>1</sup> |
| Mounting set white aluminium  |
| IP20                          |
| 5500 lm                       |
| fixture 128 lm/W <sup>2</sup> |

## LED

|                                                                       |
|-----------------------------------------------------------------------|
| 3500 K                                                                |
| CRI $\geq 90$                                                         |
| L80 / 50000 h                                                         |
| initial MacAdam $\leq 2$ SDCM                                         |
| R <sub>g</sub> : 99 , R <sub>r</sub> : 90 , R <sub>t(1-15)</sub> : 89 |
| MR 0.7                                                                |
| MDER 0.64                                                             |

## Optical

|                  |
|------------------|
| wallwasher floor |
|------------------|

## Electrical

|                |
|----------------|
| non DIM        |
| 220-240 V      |
| system 50 W    |
| fixture 21.5 W |
| 36 Vf          |
| 650 mA         |
| fixture 43 W   |
| PC2            |

## Physical

|               |
|---------------|
| trim          |
| length 218 mm |
| width 118 mm  |
| height 96 mm  |
| 0.71 kg       |

## Cutout

|                              |
|------------------------------|
| diameter 105 mm              |
| length 205 mm                |
| width 105 mm                 |
| min. ceiling thickness 2 mm  |
| max. ceiling thickness 25 mm |
| recessed depth 100 mm        |

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses

## Installation instructions



## Lighting calculator



# SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740217W 048-279831G 002-90780



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000                                            | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---------------------------------------------------|--------|--------|
| LLMF               | 0.964                        | 0.923  | 0.884                                             | 0.847  | 0.811  |
| LSF                | 1                            | 1      | 1                                                 | 1      | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> Room Surface Maintenance Factor |        |        |
| MF                 | Maintenance Factor           |        | LLMF Lamp Lumens Maintenance Factor               |        |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF Lamp Survival Factor                          |        |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 33                 |
| B16                            | 53                 |
| B20                            | 67                 |
| B25                            | 83                 |
| C10                            | 40                 |
| C16                            | 64                 |
| C20                            | 80                 |
| C25                            | 100                |

## Components

### MOUNTING SET with trim 2 lamps

| TYPE                      | COLOUR          | L·W·H (MM) | ARTICLE NUMBER(S) |
|---------------------------|-----------------|------------|-------------------|
| for intermediate ceilings | white aluminium | 218-118-35 | 048-279831G       |

### POWER SUPPLY

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|------|------------|-------------------|
| 31 W | 143-43-30  | 002-90780         |



## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

| COLOUR          | L·W·H (MM)  | ARTICLE NUMBER(S) |
|-----------------|-------------|-------------------|
| white aluminium | 614-307-120 | 048-2695110       |



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

| TYPE  | L·W·H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63   | 005-6520210       |



### DIN RAIL LED DRIVER

| TYPE                           | L·W·H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2   200-1050 mA   2 x 42W | 36-88-59   | 005-6121030       |



# SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740217W 048-279831G 002-90780



Project / Type

Notes

Count / Date

## Optional electrical accessories

### POWER SUPPLY PREWIRED

| TYPE                        | ARTICLE NUMBER(S) |
|-----------------------------|-------------------|
| with junktion box   DALI-2  | 002-90767A        |
| with junktion box   DALI-2  | 002-90789A        |
| with junktion box   DALI-2  | 002-90776A        |
| with junktion box   non DIM | 002-90766A        |
| with junktion box   non DIM | 002-90780A        |
| with junktion box   non DIM | 002-90774A        |

## Electrical accessories

### THROUGH WIRING CONNECTION BOX

| TYPE                                     | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------------------------------------|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30  | 005-2531110       |
| DALI cable ø 4 – 12 mm, Linect®-Ready    | 105-58-30  | 005-2551110       |

