

# SASSO 100 round wallwasher/floor


trim 2 lamps

048-2740011W 048-2798318 002-90780




Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

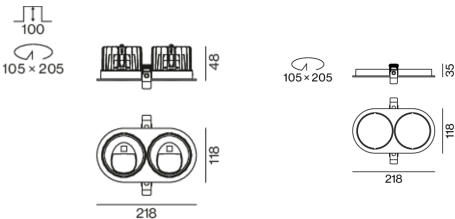

Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed	
rotation 360°	
black , RAL 9005 <sup>1</sup>	
Mounting set jet black	
IP20	
5260 lm	
fixture 122 lm/W <sup>2</sup>	

## LED

3000 K	
CRI $\geq 90$	
L80 / 50000 h	
initial MacAdam $\leq 2$ SDCM	
R <sub>g</sub> : 99 , R <sub>r</sub> : 90 , R <sub>t(1-5)</sub> : 87	
MR 0.6	
MDER 0.54	

## Optical

wallwasher floor	
------------------	--

## Electrical

non DIM	
220-240 V	
system 50 W	
fixture 21.5 W	
36 Vf	
650 mA	
fixture 43 W	
PC2	

## Physical

trim	
length 218 mm	
width 118 mm	
height 96 mm	
0.71 kg	

## Cutout

diameter 105 mm	
length 205 mm	
width 105 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 100 mm	

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses

## Installation instructions



## Lighting calculator



[048-2740011W 048-2798318 002-90780] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com