

SASSO 100 square adjustable

trim 2 lamps

048-2730119M 048-2799317 002-90780



Project / Type _____

Notes _____

Count / Date _____



General	
Ceiling , Recessed	_____
tilt max 30°	_____
gold , RAL 260-M ¹	_____
Mounting set traffic white	_____
front IP40 , back IP20	_____
4200 lm	_____
fixture 92 lm/W ²	_____


LED	
4000 K	_____
CRI ≥ 90	_____
L80 / 50000 h	_____
initial MacAdam ≤ 2 SDCM	_____
R _g : 98 , R _r : 90 , R _{t(1-5)} : 88	_____
MR 0.8	_____
MDER 0.72	_____

Optical	
medium	_____
beam angle 31°x33°	_____
UGR ≤ 16 , ≥65° <3000 cd/m ²	_____


Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; 30° tiltable; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 31°x33° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical	
non DIM	_____
220-240 V	_____
system 52 W	_____
fixture 22.7 W	_____
36 Vf	_____
650 mA	_____
fixture 45 W	_____
PC2	_____

Light distribution



Product drawing

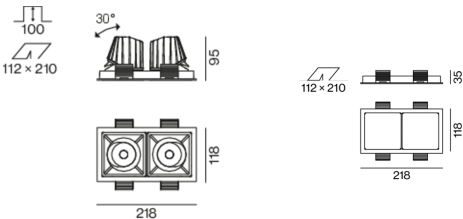

Physical	
trim	_____
length 218 mm	_____
width 118 mm	_____
height 95 mm	_____
0.53 kg	_____

Cutout	
length 210 mm	_____
width 112 mm	_____
min. ceiling thickness 2 mm	_____
max. ceiling thickness 25 mm	_____
recessed depth 100 mm	_____

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Installation instructions Lighting calculator



SASSO 100 square adjustable

trim 2 lamps

048-2730119M 048-2799317 002-90780



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.964	0.923	0.884	0.847	0.811
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a Room Surface Maintenance Factor		
MF	Maintenance Factor		LLMF Lamp Lumens Maintenance Factor		
LMF ^a	Luminaire Maintenance Factor		LSF Lamp Survival Factor		

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	33
B16	53
B20	67
B25	83
C10	40
C16	64
C20	80
C25	100

Components

MOUNTING SET with trim 2 lamps

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	traffic white	218-118-35	048-2799317



CONVERTER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
31 W	143-43-30	002-90780



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030



Optional electrical accessories

POWER SUPPLY PREWIRED

TYPE	ARTICLE NUMBER(S)
with junktion box DALI-2	002-90767A
with junktion box DALI-2	002-90789A
with junktion box DALI-2	002-90776A
with junktion box non DIM	002-90766A
with junktion box non DIM	002-90780A
with junktion box non DIM	002-90774A



SASSO 100 square adjustable

trim 2 lamps
048-2730119M 048-2799317 002-90780



Project / Type

Notes

Count / Date

Electrical accessories

THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
non DIM cable ø 4 – 12 mm, Linect®-Ready	105-58-30	005-2531110
DALI cable ø 4 – 12 mm, Linect®-Ready	105-58-30	005-2551110

