

SASSO 100 round adjustable

trim 2 lamps

048-2720217M 048-2798317 002-90780



Project / Type

Notes

Count / Date



| |
|-------------------------------|
| General |
| Ceiling Recessed |
| tilt max 30° |
| rotation 360° |
| traffic white RAL 9016 |
| Mounting set traffic white |
| front IP40 back IP20 |
| 4980 lm |
| fixture 110 lm/W ¹ |

| |
|--|
| LED |
| 3500 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| initial MacAdam ≤ 2 SDCM |
| R _g : 99 R _f : 90 R _[1-15] : 89 |
| MR 0.7 MDER 0.64 |

| |
|-------------------------|
| Optical |
| medium beam angle 31° |
| UGR ≤ 19 |


| |
|------------------------------|
| Electrical |
| non DIM |
| PC2 220-240 V |
| system 52 W fixture 22.7 W |
| total fixtures 45 W |
| 36 Vf 650 mA |

| |
|---|
| Physical |
| trim |
| length 218 mm width 118 mm height 95 mm |
| 0.52 kg |


| |
|--|
| Cutout |
| diameter 105 mm length 205 mm width 105 mm |
| min. ceiling thickness 2 mm max. ceiling thickness 25 mm |
| recessed depth 100 mm |

¹ incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing



Installation instructions

Lighting calculator



SASSO 100 round adjustable

trim 2 lamps

048-2720217M 048-2798317 002-90780



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Factor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 33 |
| B16 | 53 |
| B20 | 67 |
| B25 | 83 |
| C10 | 40 |
| C16 | 64 |
| C20 | 80 |
| C25 | 100 |

Components

MOUNTING SET with trim 2 lamps

| | | | |
|-----------------------------------|-------------------------|--------------------------|----------------------------------|
| TYPE for intermediate ceilings | COLOUR traffic white | L-W-H (MM) 218-118-35 | ARTICLE NUMBER(S) 048-2798317 |
|-----------------------------------|-------------------------|--------------------------|----------------------------------|



POWER SUPPLY


| | |
|-------------------------|--------------------------------|
| L-W-H (MM) 143-43-30 | ARTICLE NUMBER(S) 002-90780 |
|-------------------------|--------------------------------|



Optional electrical accessories

DIN RAIL POWER SUPPLY

| | |
|------------------------|----------------------------------|
| L-W-H (MM) 72-90-63 | ARTICLE NUMBER(S) 005-6520210 |
|------------------------|----------------------------------|

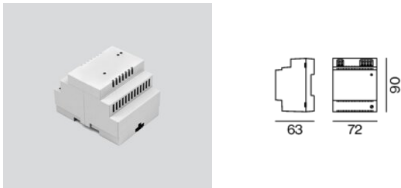

DIN RAIL LED DRIVER

| | |
|------------------------|----------------------------------|
| L-W-H (MM) 36-88-59 | ARTICLE NUMBER(S) 005-6121030 |
|------------------------|----------------------------------|



SASSO 100 round adjustable

trim 2 lamps

048-2720217M 048-2798317 002-90780



Project / Type

Notes

Count / Date

Optional electrical accessories

POWER SUPPLY PRE-WIRED with junction box

| ARTICLE NUMBER(S) |
|-------------------|
| 002-90767A |
| 002-90789A |
| 002-90776A |
| 002-90766A |
| 002-90780A |
| 002-90774A |



Electrical accessories

THROUGH WIRING CONNECTION BOX

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|------------|-------------------|
| non DIM cable ø 4 – 12 mm | 105-58-30 | 005-2531110 |
| DALI cable ø 4 – 12 mm | 105-58-30 | 005-2551110 |



Optical accessories

HONEYCOMB LOUVER

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-----------------------|-----------|--------|-------------------|
| for BO 55 SASSO 100 | jet black | 50 | 007-1965598 |



Colour rendering



SASSO 100 round adjustable

trim 2 lamps

048-2720217M 048-2798317 002-90780



Project / Type

Notes

Count / Date

CRI/R_a ≥ 92 R_e ≥ 89 (3500 K)



TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

