

# SASSO 100 round adjustable

trim

048-2720214F 048-279631G 002-90780



Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed
tilt max 30°
rotation 360°
matt silver
Mounting set white aluminium
front IP40 , back IP20
2370 lm
fixture 104 lm/W <sup>1</sup>

## LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 99 , R <sub>f</sub> : 90 , R <sub>t(1-15)</sub> : 89
MR 0.7
MDER 0.64

## Optical

flood
beam angle 45°
UGR ≤ 16 , ≥65° <3000 cd/m <sup>2</sup>

## Electrical

non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2

## Physical


trim
diameter 118 mm
height 95 mm
0.4 kg

## Cutout


diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

## Light distribution



## Product drawing

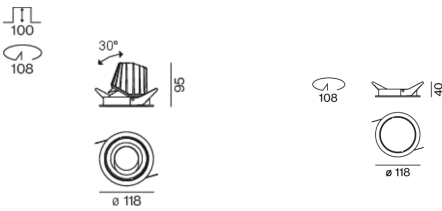

## Installation instructions



## Lighting calculator

