

SASSO 100 round adjustable

trim 2 lamps

048-2720211M 048-279831G 002-90780



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed
tilt max 30°
rotation 360°
black , RAL 9005 ¹
Mounting set white aluminium
front IP40 , back IP20
4000 lm
fixture 88 lm/W ²

LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _f : 90 , R _{t-15} : 89
MR 0.7
MDER 0.64

Optical

medium
beam angle 33°
UGR ≤ 16 , ≥65° <3000 cd/m ²

Electrical

non DIM
220-240 V
system 52 W
fixture 22.7 W
36 Vf
650 mA
fixture 45 W
PC2

Physical


trim
length 218 mm
width 118 mm
height 95 mm
0.52 kg

Cutout


diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

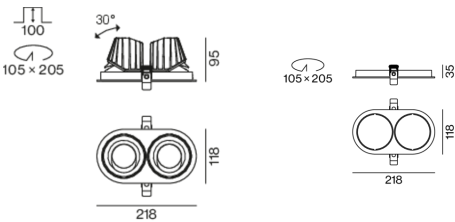

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

SASSO 100 round adjustable

trim 2 lamps

048-2720211M 048-279831G 002-90780



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

