

SASSO 100 round adjustable

trimless exposed concrete

048-2720011F 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 30° _____

rotation 360° _____

black , RAL 9005 ¹ _____

Mounting set white aluminium _____

front IP40 , back IP20 _____

2210 lm _____

fixture 98 lm/W² _____

LED

3000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_r: 90 , R_{t-15}: 87 _____

MR 0.6 _____

MDER 0.54 _____

Optical

flood _____

beam angle 45° _____

UGR ≤ 16 , ≥65° <3000 cd/m² _____

Electrical

non DIM _____

220-240 V _____

system 26.7 W _____

fixture 22.7 W _____

36 Vf _____

650 mA _____

PC2 _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____

height 162 mm _____


2.54 kg _____

Cutout


recessed depth 100 mm _____

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing

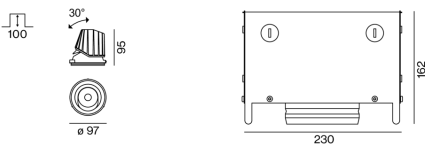

Installation instructions



Lighting calculator

