

# SASSO 100 square downlight

trim

048-2710011S 048-2797317 002-90766



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed \_\_\_\_\_

black , RAL 9005 <sup>1</sup> \_\_\_\_\_

Mounting set traffic white \_\_\_\_\_

front IP44 , back IP20 \_\_\_\_\_

1450 lm \_\_\_\_\_

fixture 95 lm/W<sup>2</sup> \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 87 \_\_\_\_\_

MR 0.6 \_\_\_\_\_

MDER 0.54 \_\_\_\_\_

## Optical

spot \_\_\_\_\_

beam angle 19° \_\_\_\_\_

UGR ≤ 13 , ≥65° <3000 cd/m<sup>2</sup> \_\_\_\_\_

PstLM ≤ 1.0 <sup>3</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>3</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 17.9 W \_\_\_\_\_

fixture 15.2 W \_\_\_\_\_

36 V<sub>f</sub> \_\_\_\_\_

450 mA \_\_\_\_\_

PC2 \_\_\_\_\_

## Physical

trim \_\_\_\_\_

length 118 mm \_\_\_\_\_

width 118 mm \_\_\_\_\_

height 75 mm \_\_\_\_\_

1.4 kg \_\_\_\_\_

## Cutout

length 112 mm \_\_\_\_\_

width 112 mm \_\_\_\_\_


min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_


recessed depth 80 mm \_\_\_\_\_

Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 19° beam; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

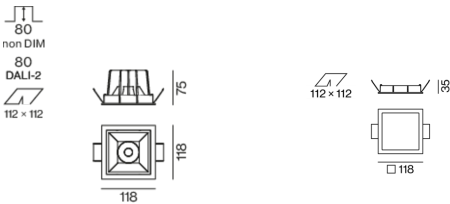

# SASSO 100 square downlight

trim

048-2710011S 048-2797317 002-90766



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

