

SASSO 100 round downlight

trimless exposed concrete

048-2700914S 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General
Ceiling , Recessed
rotation 360°
matt silver
Mounting set white aluminium
front IP44 , back IP20
1980 lm
fixture 87 lm/W ¹


LED
2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 97 , R _r : 91 , R _{t(1-15)} : 87
MR 0.52
MDER 0.47

Optical
spot
beam angle 19°
UGR ≤ 13 , ≥65° <3000 cd/m²


Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 19° beam; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical
non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2

Light distribution



Product drawing

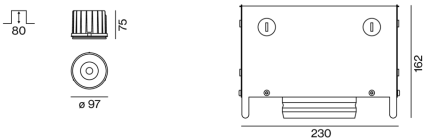

Physical
trimless for exposed concrete ceiling
length 230 mm
width 230 mm
height 162 mm
2.54 kg

Cutout
recessed depth 80 mm

¹ incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

