

SASSO 100 round downlight

trim 2 lamps

048-2700214S 048-279831G 002-90780



Project / Type
Notes
Count / Date



--	--	--	--

General
Ceiling , Recessed
matt silver
Mounting set white aluminium
front IP44 , back IP20
4200 lm
fixture 93 lm/W ¹

LED
3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _f : 90 , R ₍₁₋₁₅₎ : 89
MR 0.7
MDER 0.64

Optical
spot
beam angle 19°
UGR ≤ 13


Electrical
non DIM
220-240 V
system 52 W
fixture 22.7 W
36 Vf
650 mA
fixture 45 W
PC2

Physical
trim
length 218 mm
width 118 mm
height 75 mm
0.52 kg


Cutout
diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing

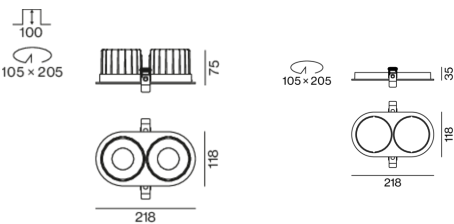

Installation instructions



Lighting calculator

