

SASSO 100 round downlight

trim 2 lamps

048-2700117M 048-279831G 002-90780



Project / Type	
Notes	
Count / Date	



--	--	--	--

General
Ceiling , Recessed
white , RAL 9016 ¹
Mounting set white aluminium
front IP44 , back IP20
4360 lm
fixture 96 lm/W ²

LED
4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 98 , R _f : 90 , R ₍₁₋₁₅₎ : 88
MR 0.8
MDER 0.72

Optical
medium
beam angle 33°
UGR ≤ 19


Electrical
non DIM
220-240 V
system 52 W
fixture 22.7 W
36 Vf
650 mA
fixture 45 W
PC2

Physical
trim
length 218 mm
width 118 mm
height 75 mm
0.52 kg


Cutout
diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing

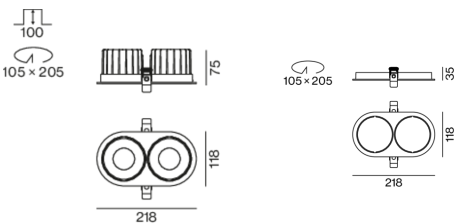

Installation instructions



Lighting calculator

