

SASSO 100 round downlight

trimless exposed concrete

048-2700117X 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

rotation 360° _____

white , RAL 9016 ¹ _____

Mounting set white aluminium _____

front IP44 , back IP20 _____

2280 lm _____

fixture 100 lm/W² _____

LED

4000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 , R_r: 90 , R_{t(1-15)}: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optical

super wide flood _____

beam angle 69° _____

Electrical

non DIM _____

220-240 V _____

system 26.7 W _____

fixture 22.7 W _____

36 Vf _____

650 mA _____

PC2 _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____


height 162 mm _____

2.54 kg _____


Cutout

recessed depth 80 mm _____

Light distribution



Product drawing

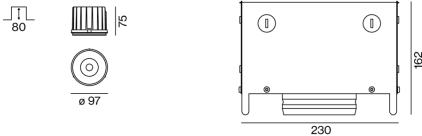

¹ RAL code

² incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

