


048-2700019S 048-279831G 002-90766



Project / Type

Notes

Count / Date

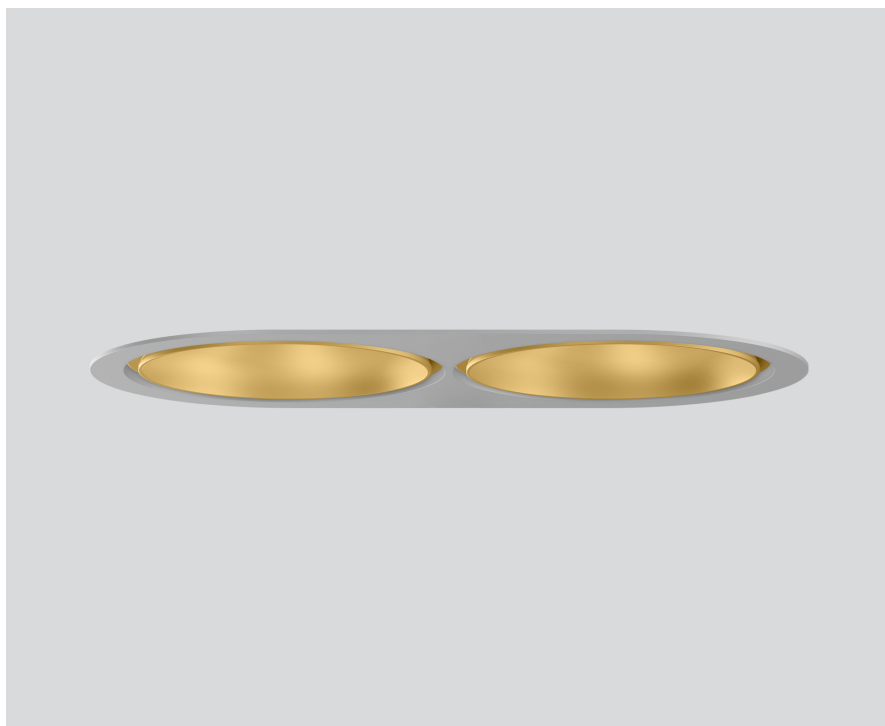

Ceiling | Recessed

gold dust | RAL 260-M ¹

Mounting set white aluminium

front IP44 | back IP20

3280 lm

fixture 108 lm/W²

3000 K

CBI ≥ 90

180 / 50

initial MacAdam

Initial MacAdam ≤ 2 SDCM
P = 60 / P = 60 / P = 67

R_g: 99 | R_f: 90 | R_{1-15}: 87

MR 0.6 | MDER 0.54

spot | beam angle 20°

 $UGR \leq 10$
$$\text{PstLM} \leq 1.0^3 \mid \text{SVM} \leq 0.4^3$$

non DIM

PC2 | 220-240 V

system 35 W | fixture 15.2 W

total fixtures 30 W

36 Vf | 450 mA

trim

length 218 mm | width 118 mm | height 75 mm

1.41 kg


diameter 105 mm | length 205 mm | width 105 mm

min. ceiling thickness 2 mm | max. ceiling

thickness 25 mm

recessed depth 100 mm

Light distribution



Product drawing

