

SASSO 100 round downlight

trimless exposed concrete

048-2700017F 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General
Ceiling , Recessed
rotation 360°
white , RAL 9016 ¹
Mounting set white aluminium
front IP44 , back IP20
2300 lm
fixture 102 lm/W ²

LED
3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _r : 90 , R _{t(1-15)} : 87
MR 0.6
MDER 0.54


Optical
flood
beam angle 45°
UGR ≤ 19

Electrical
non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2


Physical
trimless for exposed concrete ceiling
length 230 mm
width 230 mm
height 162 mm
2.54 kg

Cutout
recessed depth 80 mm

Light distribution



Product drawing

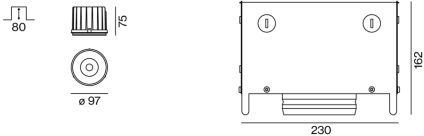

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

