

SASSO 60 emergency light pro trim soft acoustic ceiling

048-2693231 048-2696398



Project / Type

Notes

Count / Date



General
Ceiling Recessed
rotation 360°
black RAL 9005 ¹
Mounting set jet black
IP20
206 ² , 208 ³ , 217 ⁴ lm

LED
6500 K
CRI ≥ 80


Optical
emergency light beam angle 21° ² , 103°x25° ³ , 149°x150° ⁴

Electrical
PC2 220-240 V
system 1.0 W
system 206 ² , 208 ³ , 217 ⁴ lm/W ⁵


Physical
with trim for acoustic ceiling
diameter 80 mm height 94 mm
0.23 kg

Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; Pro DALI with monitoring via DALI; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

Light distribution

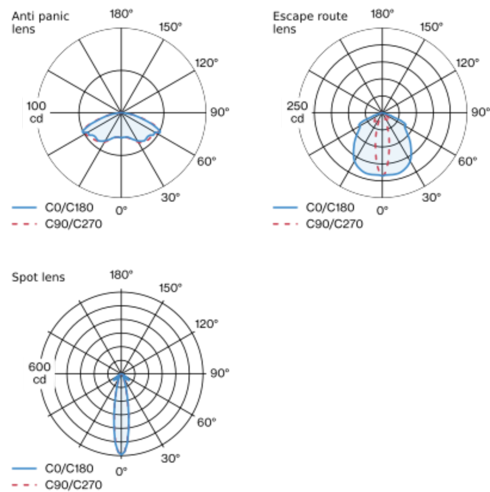

Product drawing



Cutout
diameter 74 mm
min. ceiling thickness 25 mm max. ceiling thickness 40 mm
recessed depth 110 mm

¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

