

SASSO 60 emergency light selftest trimless soft acoustic ceiling

048-2693227 048-2696197



Project / Type

Notes

Count / Date



General
Ceiling Recessed
rotation 360°
traffic white RAL 9016 ¹
Mounting set traffic white
IP20
206 ² , 208 ³ , 217 ⁴ lm

LED
6500 K
CRI ≥ 80

Optical
emergency light beam angle 21° ² , 103°x25° ³ , 149°x150° ⁴


Electrical
PC2 220-240 V
system 1.0 W
system 206 ² , 208 ³ , 217 ⁴ lm/W ⁵

Physical
trimless for acoustic ceiling
diameter 80 mm height 94 mm
0.75 kg


Cutout
diameter 74 mm
min. ceiling thickness 25 mm max. ceiling thickness 40 mm
recessed depth 110 mm

¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens ⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution

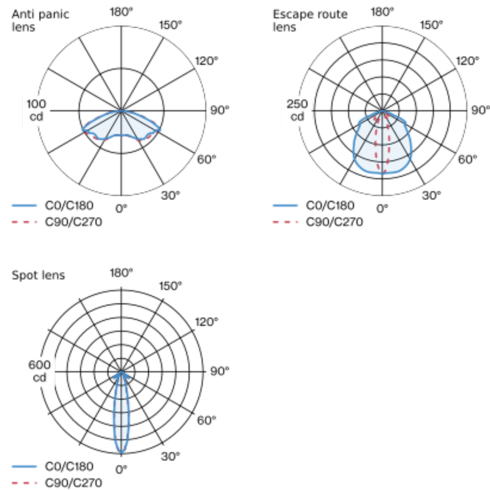

Product drawing



Installation instructions



Lighting calculator

