

# SASSO 60 emergency light

## basic trimless soft acoustic ceiling

048-2693211 048-2696197



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



<b>General</b>
Ceiling   Recessed
rotation 360°
black   RAL 9005 <sup>1</sup>
Mounting set traffic white
IP20
206 <sup>2</sup> , 208 <sup>3</sup> , 217 <sup>4</sup> lm

<b>LED</b>
6500 K
CRI ≥ 80


<b>Optical</b>
emergency light   beam angle 21° <sup>2</sup> , 103°x25° <sup>3</sup> , 149°x150° <sup>4</sup>

<b>Electrical</b>
PC2   220-240 V
system 1.0 W
system 206 <sup>2</sup> , 208 <sup>3</sup> , 217 <sup>4</sup> lm/W <sup>5</sup>


<b>Physical</b>
trimless for acoustic ceiling
diameter 80 mm   height 94 mm
0.67 kg

<b>Cutout</b>
diameter 74 mm
min. ceiling thickness 25 mm   max. ceiling thickness 40 mm
recessed depth 110 mm

### Light distribution

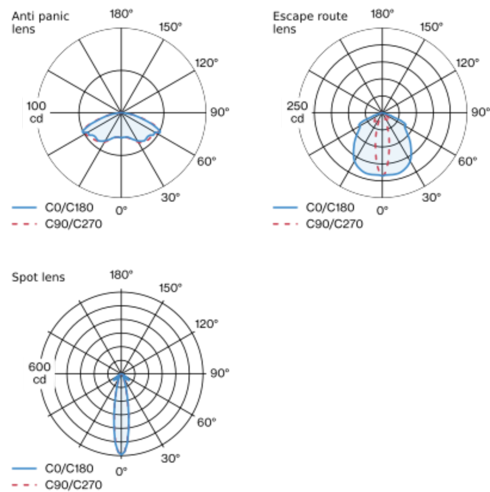

### Product drawing



<sup>1</sup> RAL code <sup>2</sup> Spot lens <sup>3</sup> Escape route lens <sup>4</sup> Anti panic lens  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator



# SASSO 60 emergency light

## basic trimless soft acoustic ceiling

048-2693211 048-2696197



Project / Type

Notes

Count / Date

### Components

#### MOUNTING SET trimless for soft acoustic ceilings

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	80	048-2696197

### Mounting accessories

#### MOUNTING TOOL

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
traffic black	77-77-35	048-2695918



### Electrical accessories

#### REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

