


# SASSO 60 round adjustable trim soft acoustic ceiling

048-2622E19F 048-2696398 002-90762



Project / Type \_\_\_\_\_  
 Notes \_\_\_\_\_  
 Count / Date \_\_\_\_\_

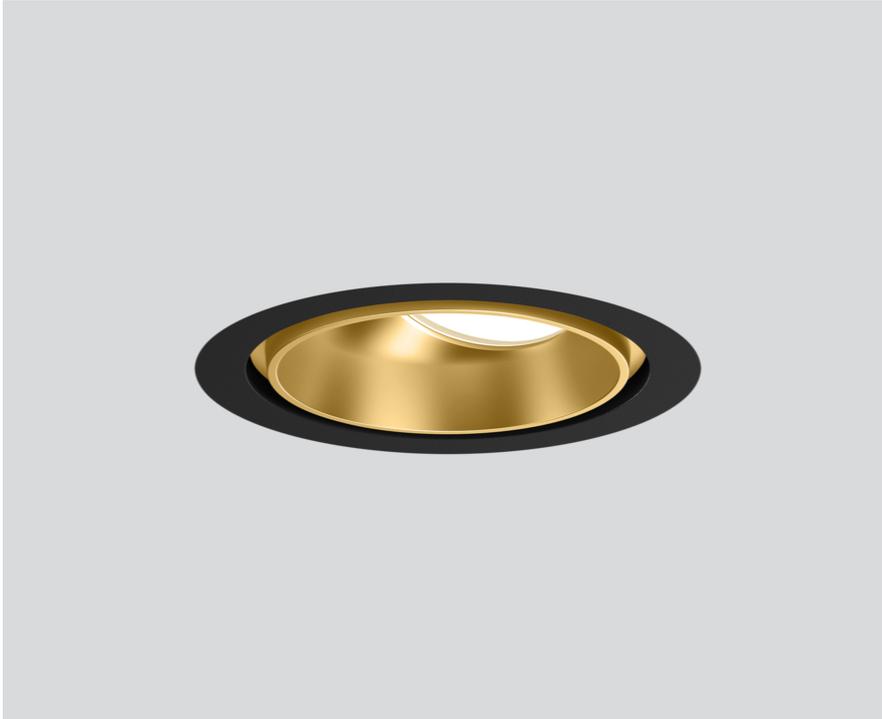

## General

Ceiling , Recessed  
 tilt max 30°  
 rotation 360°  
 gold , RAL 260-M<sup>1</sup>  
 Mounting set traffic black for acoustic ceilings  
 front IP40 , back IP20  
 692 lm  
 fixture 68 lm/W<sup>2</sup>

## LED

colour warm dimming  
 1800 K - 3000 K  
 CRI ≥ 90  
 L85 / 50000 h  
 initial MacAdam ≤ 3 SDCM  
 R<sub>g</sub>: 101 , R<sub>f</sub>: 94 , R<sub>f(1-15)</sub>: 96  
 MR 0.64  
 MDER 0.58

## Optical

flood  
 beam angle 36°  
 UGR ≤ 19  
 PstLM ≤ 1.0<sup>3</sup>  
 SVM ≤ 0.4<sup>3</sup>

## Electrical

DALI-2  
 220-240 V  
 system 12.0 W  
 fixture 10.2 W  
 300 mA  
 PC2  
 1 DALI Addr.

## Physical


with trim for acoustic ceiling  
 diameter 80 mm  
 height 48 mm  
 0.36 kg

## Cutout


diameter 74 mm  
 min. ceiling thickness 25 mm  
 max. ceiling thickness 40 mm  
 recessed depth 110 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic black for acoustic ceilings; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 1800K - 3000K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 36° beam; UGR ≤ 19; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code

<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

# SASSO 60 round adjustable trim soft acoustic ceiling

048-2622E19F 048-2696398 002-90762



Project / Type

---

Notes

---

Count / Date

---

**Installation  
instructions**



**Lighting  
calculator**



# SASSO 60 round adjustable trim soft acoustic ceiling

048-2622E19F 048-2696398 002-90762



Project / Type \_\_\_\_\_  
 Notes \_\_\_\_\_  
 Count / Date \_\_\_\_\_

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.94	0.91	0.89	0.86
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF  
 MF Maintenance Factor  
 LMF<sup>a</sup> Luminaire Maintenance Factor

RSMF<sup>a</sup> Room Surface Maintenance Factor  
 LLMF Lamp Lumens Maintenance Factor  
 LSF Lamp Survival Factor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B16	30
C10	23
C16	36

## Components

### MOUNTING SET trim for soft acoustic ceilings

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic black for acoustic ceilings	80	048-2696398



### POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
28 W	143-43-30	002-90762



### Mounting accessories

#### MOUNTING TOOL

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
traffic black	77-77-35	048-2695918



### Optional electrical accessories

#### DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2   200-1050 mA   2 x 42W	36-88-59	005-6121030



#### DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



### Optional electrical accessories

#### POWER SUPPLY PREWIRED

TYPE	ARTICLE NUMBER(S)
with junction box   DALI-2	002-90790A
with junction box   DALI-2	002-90748A
with junction box   non DIM	002-90771A
with junction box   non DIM	002-90742A



[048-2622E19F 048-2696398 002-90762] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
 © XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.05.2025

# SASSO 60 round adjustable trim soft acoustic ceiling

048-2622E19F 048-2696398 002-90762



Project / Type

Notes

Count / Date

## Optional electrical accessories

### POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
with loop through function	185-30-21	002-90770
with loop through function	185-30-21	002-90747

