

SASSO 100 round downlight

trim 2 lamps


048-2700914W 048-279831G 002-90789



Project / Type

Notes

Count / Date

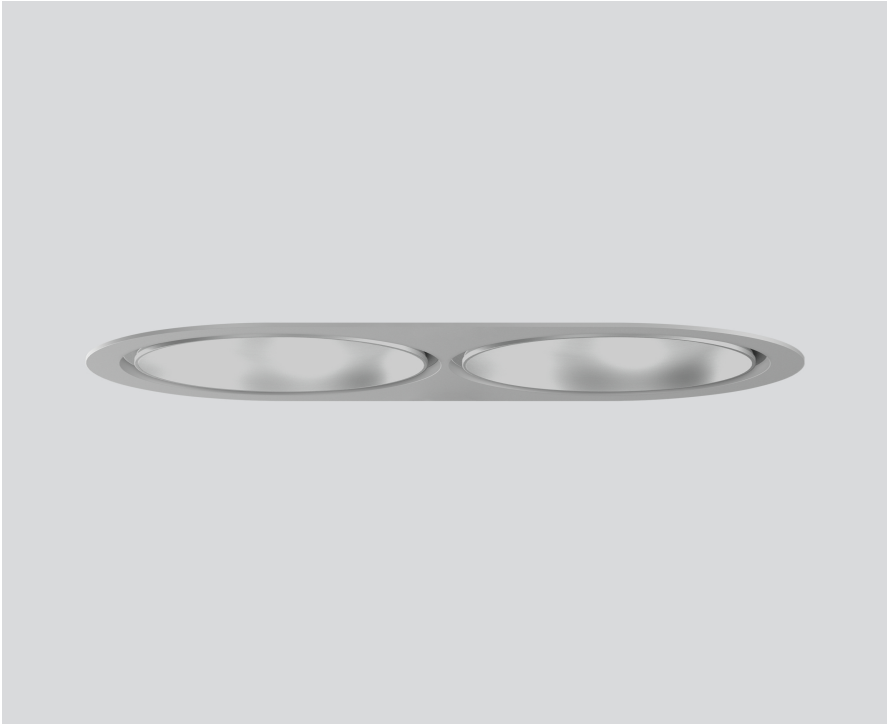

↑ IP20
↓ IP44

X-PERT

X-PERT

220-240 V

General
Ceiling Recessed
matt silver
Mounting set white aluminium
front IP44 back IP20
4840 lm
fixture 106 lm/W ¹

LED
2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 97 R _f : 91 R ₍₁₋₁₅₎ : 87
MR 0.52 MDER 0.47

Optical
wide flood beam angle 56°
≥65° <3000 cd/m²
PstLM ≤ 1.0 ² SVM ≤ 0.4 ²


Electrical
DALI-2 1 DALI Addr.
PC2 220-240 V
system 52 W fixture 22.7 W
total fixtures 45 W
36 Vf 650 mA

Physical
trim
length 218 mm width 118 mm height 75 mm
0.68 kg


Cutout
diameter 105 mm length 205 mm width 105 mm
min. ceiling thickness 2 mm max. ceiling thickness 25 mm
recessed depth 100 mm

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions

Lighting calculator

