




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K,
tunable white 1800 K - 4000 K,
tunable white 2700 K - 6500 K
CRI $\geq$ 90, CRI $\geq$ 92 / 2 SDCM, 3
SDCM
up to 143 lm/W
L80 / 50000 h, L85 / 50000 h,
L90 / 50000 h
DALI-2, non DIM
front IP20

Types



Colour



Mounting set



Light distributions



SASSO 100 round wallwasher/floor

recessed 1 lamp

EN Round recessed spotlight; installation without tools in mounting set (trimless or with trim) with ball catch system; surface lacquered; installation possible in different housings; asymmetric radiation characteristic; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; no multiple shadows; efficient LEDs with very good colour rendering

DE Runder Einbaustrahler; werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand) durch Kugelschnappsystem; Oberfläche lackiert; Einbau in unterschiedlichen Gehäusen möglich; asymmetrische Abstrahlcharakteristik; mit speziell berechnetem, asymmetrischem Reflektor für homogene vertikale Beleuchtungsstärken; hochwertiger Reflektor mit mikrofaccettierter, aluminiumbedampfter Oberfläche; keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe



CRI $\geq$ 95 2
SDCM
(optional)




SASSO 100 round wallwasher/floor



WALLWASHER FLOOR CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	FIXTURE	ORDER CODE
14.6 W, 450 mA	2700 K	1910 lm	131 lm/W	0 4 8 - 2 7 4 0 9 1 ☒ W
	3000 K	1980 lm	136 lm/W	0 4 8 - 2 7 4 0 0 1 ☒ W
	3500 K	2030 lm	140 lm/W	0 4 8 - 2 7 4 0 2 1 ☒ W
	4000 K	2080 lm	143 lm/W	0 4 8 - 2 7 4 0 1 1 ☒ W
21.5 W, 650 mA	2700 K	2590 lm	121 lm/W	0 4 8 - 2 7 4 0 9 1 ☒ W
	3000 K	2680 lm	125 lm/W	0 4 8 - 2 7 4 0 0 1 ☒ W
	3500 K	2750 lm	128 lm/W	0 4 8 - 2 7 4 0 2 1 ☒ W
	4000 K	2820 lm	131 lm/W	0 4 8 - 2 7 4 0 1 1 ☒ W



SASSO 100 round wallwasher/floor (TW 2700K - 6500K)



WALLWASHER FLOOR DALI-2, CRI ≥ 92

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
24.1 W	tunable w.	1840 lm	76 lm/W	0 4 8 - 2 7 4 0 D 3 ☒ W

DALI-2 power supply included

SASSO 100 round wallwasher/floor (TW 1800K - 4000K)




WALLWASHER FLOOR DALI-2, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
27.6 W	tunable w.	2020 lm	73 lm/W	0 4 8 - 2 7 4 0 L 3 ☒ W

DALI-2 power supply included

Electrical mounting accessories (optional)




THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105-58-30	0 0 5 - 2 5 3 1 1 1 0
DALI cable ø 4 – 12 mm	105-58-30	0 0 5 - 2 5 5 1 1 1 0

Linect®-Ready

Mounting accessories (required)



MOUNTING SET trimless

TYPE	COLOUR	Ø-H (mm)	ORDER CODE
for plasterboard ceilings 12.5/15/25 mm	traffic white	105-29	0 4 8 - 2 7 9 6 1 1 7




MOUNTING SET trimless for soft acoustic ceilings


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	25-40 mm	114-27	0 4 8 - 2 7 9 6 1 9 7

Order options


COLOUR	
jet black RAL 9005	1
matt silver	4
traffic white RAL 9016	7
gold dust RAL 260-M	9

**MOUNTING SET with trim 1 lamp** for intermediate ceilings, 2-25 mm


COLOUR	Ø-H (mm)	ORDER CODE
traffic white	118-40	0 4 8 - 2 7 9 6 3 1 7
jet black	118-40	0 4 8 - 2 7 9 6 3 1 8
white aluminium	118-40	0 4 8 - 2 7 9 6 3 1 G

**MOUNTING SET with trim** for soft acoustic ceilings


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	25-40 mm	114-25	0 4 8 - 2 7 9 6 3 9 7

**MOUNTING SET with trim** for soft acoustic ceilings


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
jet black	25-40 mm	114-25	0 4 8 - 2 7 9 6 3 9 8

Mounting accessories (optional)**EXPOSED CONCRETE MOUNTING HOUSING**

COLOUR	L-W-H (mm)	ORDER CODE
white aluminium	230-230-162	0 4 8 - 2 7 9 5 2 1 0

**MOUNTING TOOL**

TYPE	COLOUR	L-W-H (mm)	ORDER CODE
for soft acoustic ceilings	traffic black	104-104-35	0 4 8 - 2 7 9 5 9 1 0

**PRIMED CONCRETE MOUNTING HOUSING**

L-W-H (mm)	ORDER CODE
614-307-120	0 4 8 - 2 6 9 5 1 1 0

order mounting set separately


Electrical accessories (required)**POWER SUPPLY PC2, -264 V AC**

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
450 mA 21 W non DIM	198 V AC	η 86 %	143-43-30	0 0 2 - 9 0 7 6 6
450 mA 28 W DALI-2	176 V AC	η 85 %	143-43-30	0 0 2 - 9 0 7 6 7
650 mA 31 W non DIM	198 V AC	η 88 %	143-43-30	0 0 2 - 9 0 7 8 0
650 mA 28 W DALI-2	176 V AC	η 85 %	143-43-30	0 0 2 - 9 0 7 8 9

Electrical accessories (optional)**DIN RAIL LED DRIVER**

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 - 1050 mA settable const. current | 2 × 42 W | 48 V DC | U OUT 10 - 40 V

**DIN RAIL POWER SUPPLY**

L-W-H (mm)	ORDER CODE
72-90-63	0 0 5 - 6 5 2 0 2 1 0

220-240 V AC | 160 W | 48 V DC constant voltage

POWER SUPPLY PRE-WIRED with junction box 28 W, PC2, -264 V AC

TYPE	INPUT VOLTAGE	EFFICIENCY	ORDER CODE
450 mA non DIM	198 V AC	η 88 %	0 0 2 - 9 0 7 6 6 A
450 mA DALI-2	176 V AC	η 85 %	0 0 2 - 9 0 7 6 7 A
700 mA non DIM	198 V AC	η 88 %	0 0 2 - 9 0 7 7 4 A
700 mA DALI-2	176 V AC	η 85 %	0 0 2 - 9 0 7 7 6 A
650 mA non DIM	198 V AC	η 88 %	0 0 2 - 9 0 7 8 0 A
650 mA DALI-2	176 V AC	η 85 %	0 0 2 - 9 0 7 8 9 A

Hotel Schwanen, Metzingen


Germany

Architect

HEIKAUS Architektur
GmbH

Photographer


Martin Baitinger

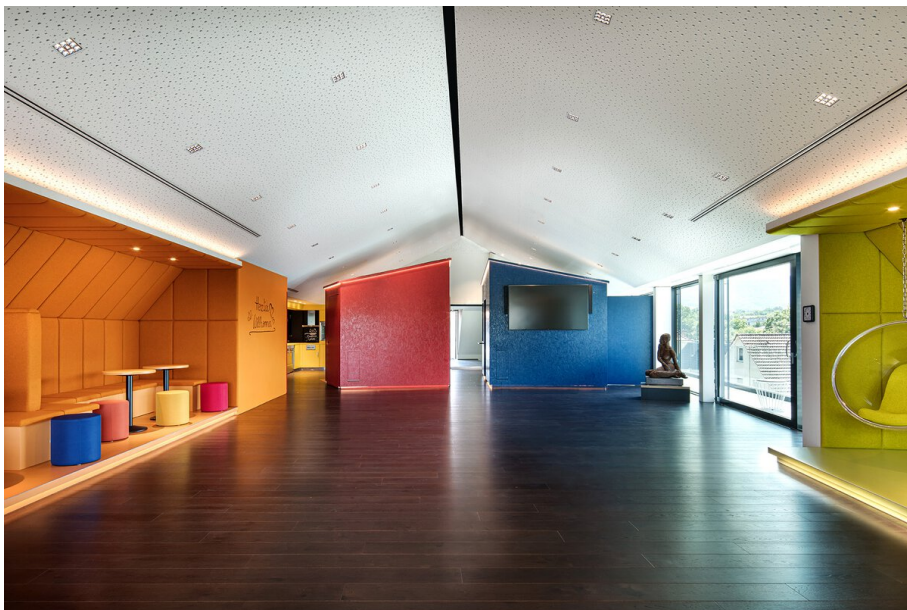


Used products




**UNICO Q9 basic
recessed**



**SASSO 60 round
recessed 1 lamp**




**SASSO 100 round
adjustable recessed
1 lamp**



**SASSO 100 round
downlight recessed 1
lamp**



**SASSO 100 round
wallwasher recessed
1 lamp**



**SASSO 100 round
wallwasher/floor
recessed 1 lamp**



