

# SASSO 100 round adjustable trim soft acoustic ceiling


048-2720119M 048-2796398 002-90780



Project / Type

Notes

Count / Date

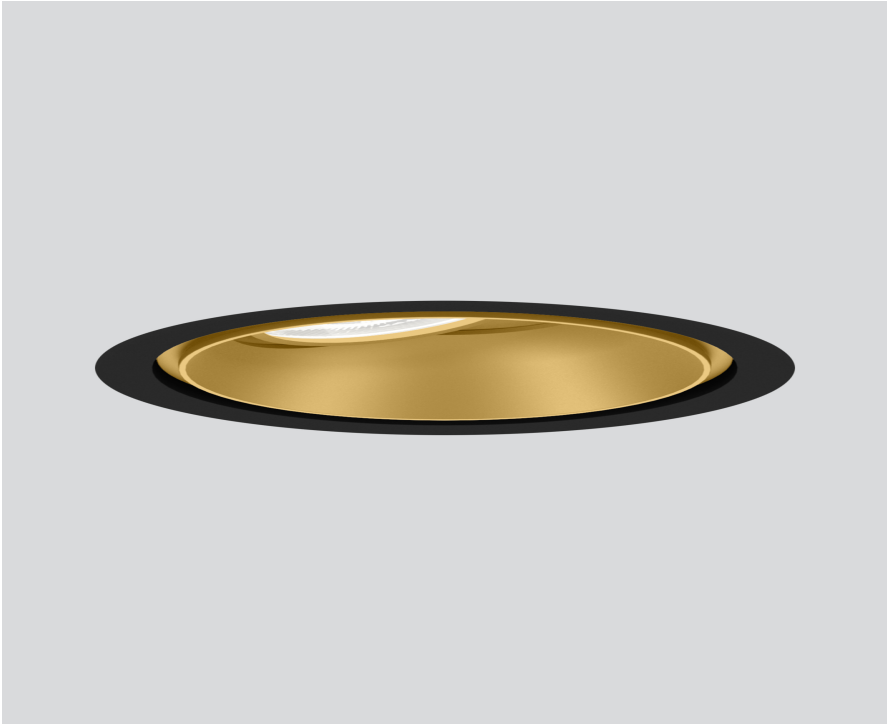

General
Ceiling   Recessed
tilt max 30°
rotation 360°
gold   RAL 260-M <sup>1</sup>
Mounting set jet black
front IP40   back IP20
2510 lm
fixture 110 lm/W <sup>2</sup>


LED
4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 98   R <sub>f</sub> : 90   R <sub>t-15</sub> : 88
MR 0.8   MDER 0.72

Optical
medium   beam angle 31°
UGR ≤ 16   ≥65° <3000 cd/m <sup>2</sup>


Electrical
non DIM
PC2   220-240 V
system 26.7 W   fixture 22.7 W
36 Vf   650 mA

Physical
with trim for acoustic ceiling
diameter 114 mm   height 95 mm
0.54 kg

## Light distribution



## Product drawing



Cutout
diameter 100 mm
min. ceiling thickness 25 mm   max. ceiling thickness 40 mm
recessed depth 100 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses

Installation instructions

Lighting calculator

