

MINO CIRCLE ACOUSTIC 1500


suspended
034-272211B



Project / Type

Notes

Count / Date

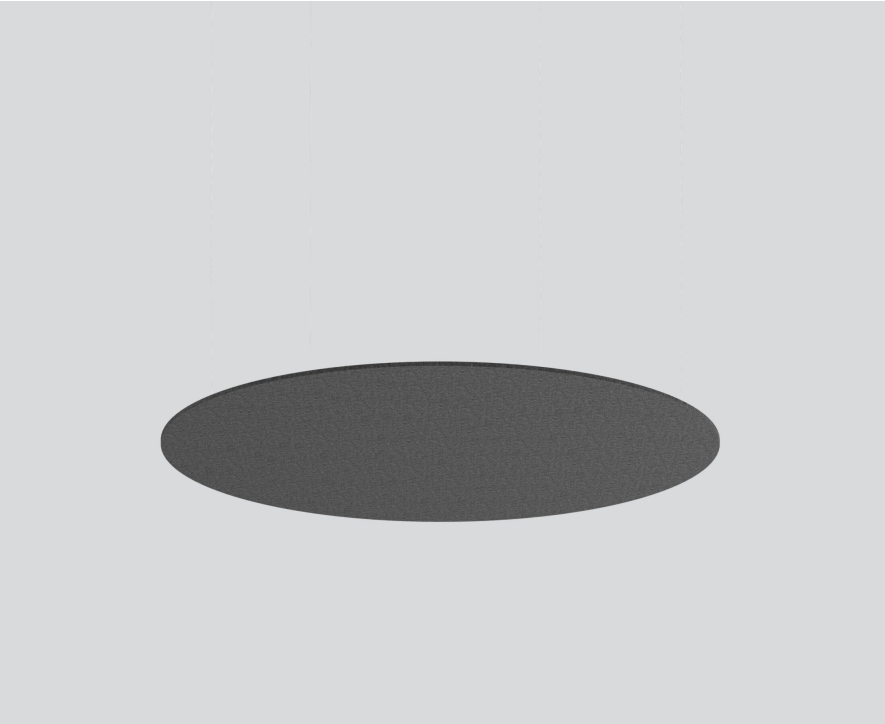

General

Ceiling | Suspended

anthracite

fire resistance class: B-s2, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

diameter 1434 mm | height 24 mm

7.2 kg

Acoustics

Alpha w (α_w) up to 0.65 ¹

SAC (sound absorption class) up to C ¹

NRC up to 0.7 ¹

SAA up to 0.74 ¹


¹ Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 100cm

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, anthracite; colour may deviate; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

Product drawing



MINO CIRCLE ACOUSTIC 1500

suspended
034-27221B



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.97	1.2	1.83	2.67	3.07	3.3

Sound absorption coefficient (a_p)

