

MINO CIRCLE ACOUSTIC 1500


ceiling
034-271211B



Project / Type


Notes

Count / Date

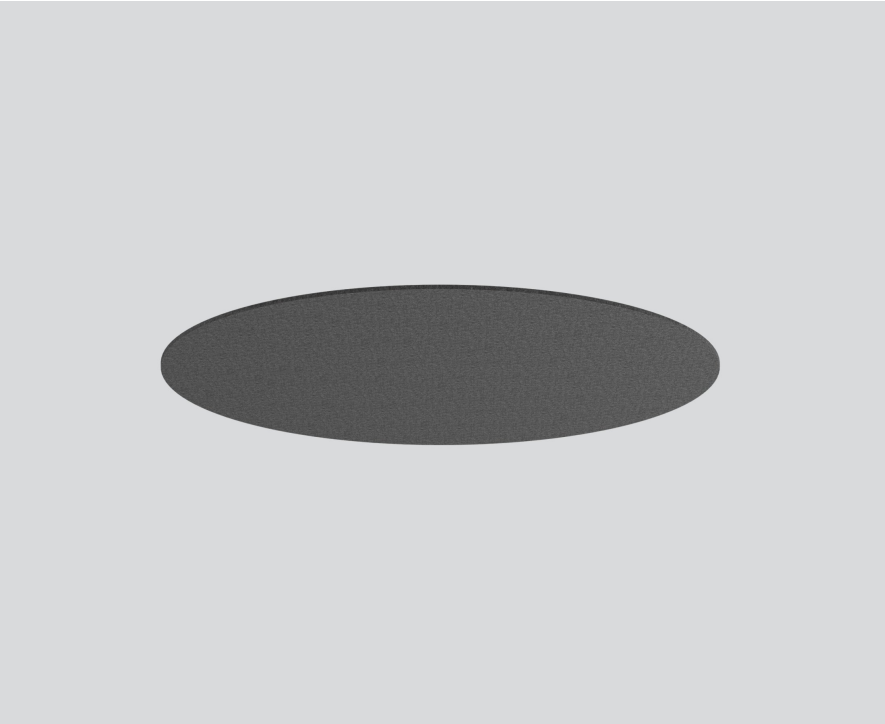

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, anthracite; colour may deviate; absorption of direct sound; this creates high acoustic performance; for ceiling surface mounting;

Product drawing



General

Ceiling | Surface

anthracite

fire resistance class: B-s2, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

diameter 1434 mm | height 24 mm

8.4 kg

ceiling

Acoustics

Alpha w (α_w) up to 0.7 ¹

SAC (sound absorption class) up to C ¹

NRC up to 1.15 ¹

SAA up to 1.16 ¹

¹ Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 3cm

Installation instructions



MINO CIRCLE ACOUSTIC 1500

ceiling
034-271211B



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.3	0.6	1.43	2.3	2.17	2.1

Sound absorption coefficient (α_p)

