

# MINO CIRCLE ACOUSTIC 1000


ceiling  
034-271111B



Project / Type


Notes

Count / Date

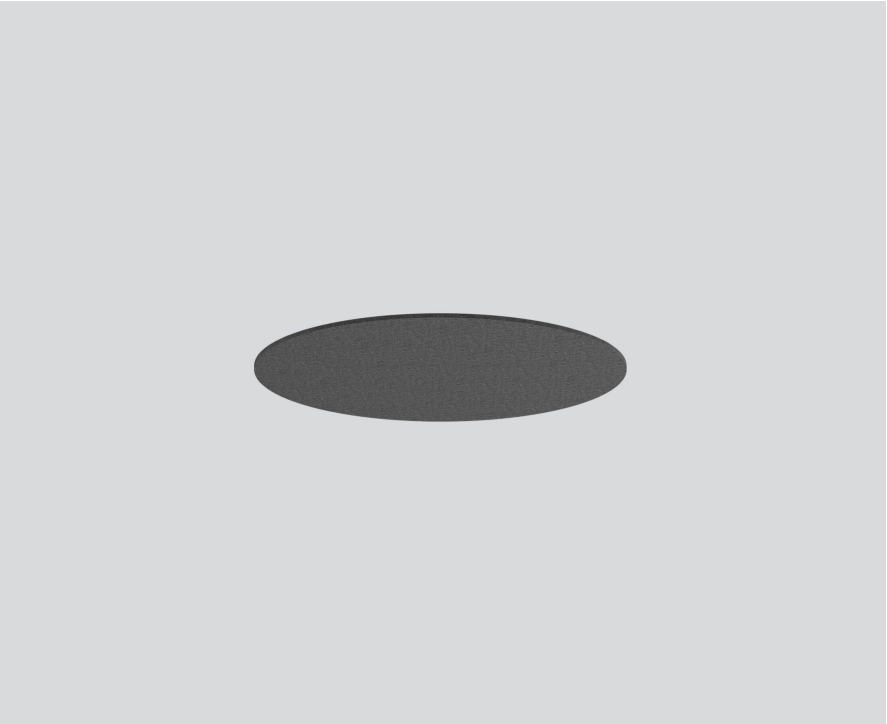

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, anthracite; colour may deviate; absorption of direct sound; this creates high acoustic performance; for ceiling surface mounting;

## Product drawing



General

Ceiling | Surface

anthracite

fire resistance class: B-s2, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

diameter 937 mm | height 24 mm

4.5 kg

ceiling

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.7 <sup>1</sup>

SAC (sound absorption class) up to C <sup>1</sup>

NRC up to 1.15 <sup>1</sup>

SAA up to 1.16 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 3cm

## Installation instructions



# MINO CIRCLE ACOUSTIC 1000

ceiling  
034-271111B



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.1	0.27	0.7	1.17	1.07	1

## Sound absorption coefficient ( $\alpha_p$ )

