

FRAME 40 flex high lumen

trim system

042-012F137 006-4210010Z 042-7002017



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed
traffic white , RAL 9016 ¹
IP20
2000 lm
2000 lm/m

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _r : 92 , R _{t(1-15)} : 90
MR 0.81
MDER 0.74

Optical

Microprismatic
microprismatic
PstLM ≤ 1.0 ² ³
SVM ≤ 0.4 ² ³

Electrical

DALI-2
220-240 V
system 18.5 W
system 108 lm/W ⁴
PC1
18 W/m

Physical


trim
length 1000 mm
width 55 mm
height 60 mm
2.63 kg
L (mm): 500 - 1000, breakable every 62.5mm

Cutout


length 1010 mm
width 45 mm
min. ceiling thickness 8 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ RAL code ² 1000mm
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing

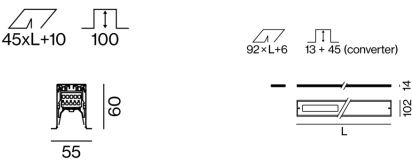

Installation instructions



Lighting calculator

