

FRAME 40 flex high lumen

trim system

042-012F037 006-4210010H 042-7002017



Project / Type


Notes

Count / Date




Luminaire housing made of extruded aluminium profile; recessed light with wrap around edge; for continuous lighting systems; suitable for ceiling thickness of 8-25 mm; surface traffic white powder coated; luminaire profile can be pre-mounted; pre-assembled power rail for power supply in luminaire profile; voltage tap of the light inset on the power rail; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

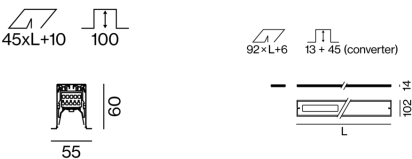

General

Ceiling | Recessed

traffic white | RAL 9016 ¹

IP20

2100 lm

2100 lm/m

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 | R_f: 91 | R_{fl-15}: 89

MR 0.61 | MDER 0.55

Optical

High Performance Opal | opal (lambertsch)

P_{stLM} $\leq 1.0^{2\ 3\ 4\ 5\ 6\ 7\ 8\ 9\ 10\ 11}$ | SVM $\leq 0.4^{2\ 3\ 4\ 5\ 6\ 7\ 8\ 9\ 10\ 11}$

Electrical

DALI-2

PC1 | 220-240 V

system 18.5 W

system 114 lm/W ¹²

18 W/m

Physical

trim

length 1000 mm | width 55 mm | height 60 mm

1.7 kg

L (mm): 500 - 1000, breakable every 62.5mm

Cutout

length 1010 mm | width 45 mm

min. ceiling thickness 8 mm | max. ceiling thickness 25 mm

recessed depth 100 mm

¹ RAL code ² 1000mm ³ 625mm ⁴ 562.5mm ⁵ 687.5mm ⁶ 750mm
⁷ 812.5mm ⁸ 600mm ⁹ 937.5mm ¹⁰ 875mm
¹¹ Value of containing product at full load (undimmed)
¹² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



FRAME 40 flex high lumen

trim system

042-012F037 006-4210010H 042-7002017



| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.92 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Factor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 21 |
| B13 | 27 |
| B16 | 34 |
| B20 | 42 |
| C10 | 35 |
| C13 | 45 |
| C16 | 56 |
| C20 | 70 |

Components

LINEAR COVER

ARTICLE NUMBER(S)
006-4210010H

INSTALLATION CHANNEL with trim

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------|------------|-------------------|
| traffic white | 1000-55-60 | 042-7002017 |

Mounting accessories

END CAPS recessed trim

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------|-----------------|------------|-------------------|
| 1 pair | traffic white | 55-60-8 | 042-7090017 |
| 1 pair | white aluminium | 55-60-8 | 042-709001G |
| 1 pair | jet black | 55-60-8 | 042-7090018 |

Mounting accessories

LINEAR CONNECTOR

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------------------|-----------|------------|-------------------|
| mechanical | jet black | 120-36-14 | 042-7091110 |
| mechanical & electrical | jet black | 120-36-14 | 042-7091230 |

OPAL COVER LINEAR CONNECTOR

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|------------|-------------------|
| pure white | 120-36-14 | 042-1091910 |

MICROPRISMATIC COVER LINEAR CONNECTOR

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|------------|-------------------|
| pure white | 120-36-14 | 042-1091810 |



FRAME 40 flex high lumen

trim system

042-012F037 006-4210010H 042-7002017



Project / Type

Notes

Count / Date

Mounting accessories

MOUNTING BRACKET recessed trim

| TYPE | ARTICLE NUMBER(S) |
|-----------|-------------------|
| 1 piece | 042-7092110 |
| 25 pieces | 042-7092110.25 |



Electrical accessories

POWER FEEDER UNIT

| L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|-------------------|
| 80-36-17 | 042-1093230 |



Optical accessories

BLIND COVER

| COLOUR | ARTICLE NUMBER(S) |
|-----------------|-------------------|
| traffic white | 006-4210017B |
| jet black | 006-4210018B |
| white aluminium | 006-421001GB |
| traffic white | 006-4220017B |
| jet black | 006-4220018B |
| white aluminium | 006-422001GB |
| traffic white | 006-4230017B |
| jet black | 006-4230018B |
| white aluminium | 006-423001GB |



CONTINUOUS LINEAR COVER

| ARTICLE NUMBER(S) |
|-------------------|
| 006-2225010H |
| 006-2206010H |

