

# FRAME 40 high lumen

trim system

042-0126137 006-4230010H 042-700601G



Project / Type


Notes

Count / Date




Luminaire housing made of extruded aluminium profile; recessed light with wrap around edge; for continuous lighting systems; suitable for ceiling thickness of 8-25 mm; surface white aluminium powder coated; luminaire profile can be pre-mounted; pre-assembled power rail for power supply in luminaire profile; voltage tap of the light inset on the power rail; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

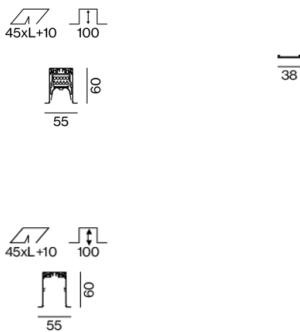

## General

Ceiling | Recessed

white aluminium | RAL 9006

IP20

6790 lm

2260 lm/m

## LED

4000 K

CRI  $\geq 90$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 99 | R<sub>f</sub>: 92 | R<sub>f(1-15)</sub>: 90

MR 0.81 | MDER 0.74

## Optical

High Performance Opal | opal (lambertsch)

PstLM  $\leq 1.0$  <sup>1</sup> | SVM  $\leq 0.4$  <sup>1</sup>

## Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 54 W

system 126 lm/W <sup>2</sup>

18 W/m

## Physical

trim

length 3000 mm | width 55 mm | height 60 mm

4.8 kg

not breakable

## Cutout

length 3010 mm | width 45 mm

min. ceiling thickness 8 mm | max. ceiling thickness 25 mm

recessed depth 100 mm

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator



# FRAME 40 high lumen

trim system

042-0126137 006-4230010H 042-700601G



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000  | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF               | 0.98                         | 0.96   | 0.94  | 0.92   | 0.9    |
| LSF                | 1                            | 1      | 1   | 1      | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> Room Surface Maintenance Factor |        |        |
| MF                 | Maintenance Factor           |        | LLMF Lamp Lumens Maintenance Factor               |        |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF Lamp Survival Factor                          |        |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 13                 |
| B13                            | 17                 |
| B16                            | 21                 |
| B20                            | 27                 |
| C10                            | 21                 |
| C13                            | 28                 |
| C16                            | 35                 |
| C20                            | 45                 |

## Components


### LINEAR COVER

| TYPE | ARTICLE NUMBER(S) |
|------|-------------------|
| opal | 006-4230010H      |



### INSTALLATION CHANNEL with trim

| COLOUR          | L-W-H (MM) | ARTICLE NUMBER(S) |
|-----------------|------------|-------------------|
| white aluminium | 3000-55-60 | 042-700601G       |

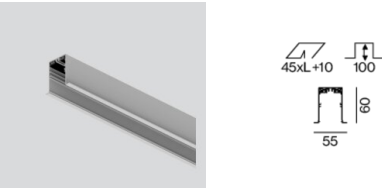

## Mounting accessories

### END CAPS recessed trim

| TYPE   | COLOUR          | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------|-----------------|------------|-------------------|
| 1 pair | traffic white   | 55-60-8    | 042-7090017       |
| 1 pair | white aluminium | 55-60-8    | 042-709001G       |
| 1 pair | jet black       | 55-60-8    | 042-7090018       |



# FRAME 40 high lumen

trim system

042-0126137 006-4230010H 042-700601G



Project / Type

Notes

Count / Date

## Mounting accessories

### LINEAR CONNECTOR

| TYPE                    | COLOUR    | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------------------|-----------|------------|-------------------|
| mechanical              | jet black | 120-36-14  | 042-7091110       |
| mechanical & electrical | jet black | 120-36-14  | 042-7091230       |



### OPAL COVER LINEAR CONNECTOR

| COLOUR     | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|------------|-------------------|
| pure white | 120-36-14  | 042-1091910       |



### MICROPRISMATIC COVER LINEAR CONNECTOR

| COLOUR     | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|------------|-------------------|
| pure white | 120-36-14  | 042-1091810       |



## Mounting accessories

### MOUNTING BRACKET recessed trim

| TYPE      | ARTICLE NUMBER(S) |
|-----------|-------------------|
| 1 piece   | 042-7092110       |
| 25 pieces | 042-7092110.25    |



## Mounting accessories

### INSTALLATION CHANNEL corner 90° with cover

| TYPE                  | COLOUR          | L-W-H (MM) | ARTICLE NUMBER(S) |
|-----------------------|-----------------|------------|-------------------|
| opal high performance | traffic white   | 250-250-60 | 042-700C017H      |
| microprismatic        | traffic white   | 250-250-60 | 042-700C017Z      |
| opal high performance | jet black       | 250-250-60 | 042-700C018H      |
| microprismatic        | jet black       | 250-250-60 | 042-700C018Z      |
| opal high performance | white aluminium | 250-250-60 | 042-700C01GH      |
| microprismatic        | white aluminium | 250-250-60 | 042-700C01GZ      |



## Electrical accessories

### POWER FEEDER UNIT

| L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|-------------------|
| 80-36-17   | 042-1093230       |



# FRAME 40 high lumen

trim system

042-0126137 006-4230010H 042-700601G



Project / Type

Notes

Count / Date

## Optical accessories

### BLIND COVER

| COLOUR          | ARTICLE NUMBER(S) |
|-----------------|-------------------|
| traffic white   | 006-4210017B      |
| jet black       | 006-4210018B      |
| white aluminium | 006-421001GB      |
| traffic white   | 006-4220017B      |
| jet black       | 006-4220018B      |
| white aluminium | 006-422001GB      |
| traffic white   | 006-4230017B      |
| jet black       | 006-4230018B      |
| white aluminium | 006-423001GB      |





1  
38

### CONTINUOUS LINEAR COVER

| ARTICLE NUMBER(S) |
|-------------------|
| 006-2225010H      |
| 006-2206010H      |



## Colour rendering

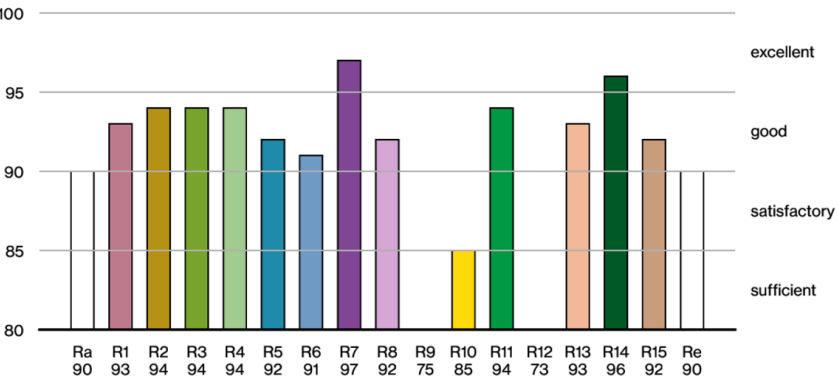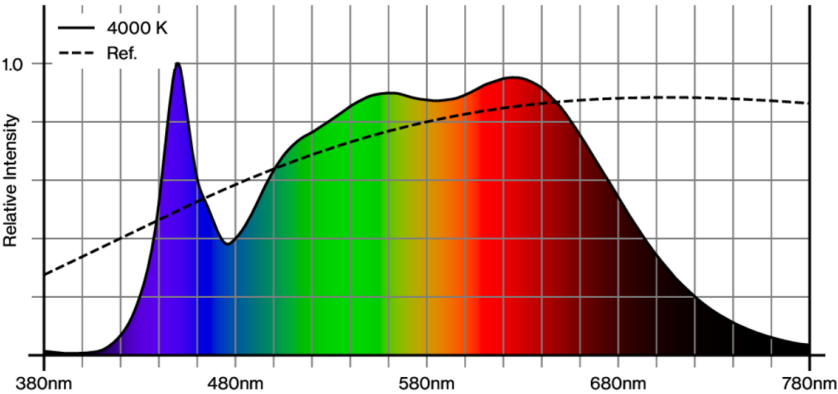

# FRAME 40 high lumen

trim system

042-0126137 006-4230010H 042-700601G




Project / Type

Notes

Count / Date

## TM30 colour vector graphic

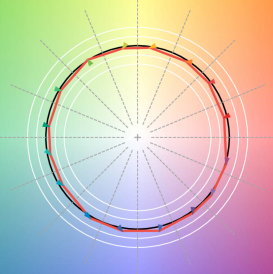

The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

