

# MINO 40 mid lumen

ceiling / suspended system


042-0114037 006-4220010H 042-100401X



Project / Type

Notes

Count / Date

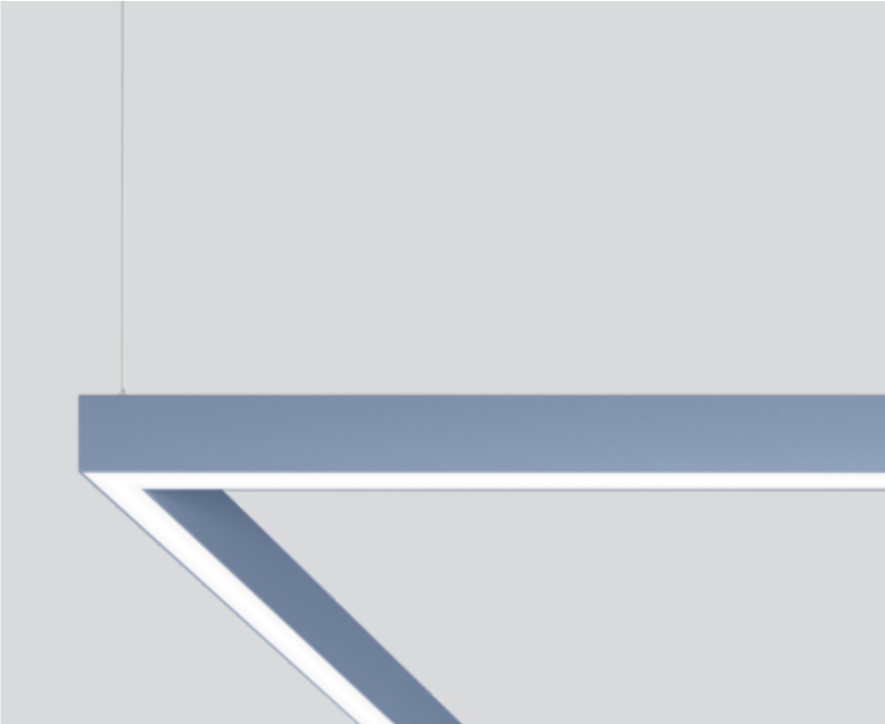

### General

Ceiling | Suspended

special colours

IP20

2720 lm

1360 lm/m

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 | R<sub>f</sub>: 91 | R<sub>f(1-15)</sub>: 89

MR 0.61 | MDER 0.55

### Optical

High Performance Opal | opal (lambertsch)

PstLM ≤ 1.0 <sup>1</sup> | SVM ≤ 0.4 <sup>1</sup>

### Electrical

DALI-2

PC1 | 220-240 V

system 23.4 W

system 116 lm/W <sup>2</sup>

12 W/m


### Physical

length 2000 mm | width 40 mm | height 65 mm

7 kg

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator

